



# ACO-RS-Z



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	<p>Model in combination with basic frame and MACO fittings (frame is notched at position of hinge).</p> <p>Model in combination with express hinge (please note frame overhang).</p> <p>Fittings cannot be mounted to bar</p> <p>Bar dimension is as standard 200 mm inset to the centre from top and bottom</p> <p>Bar distribution also possible according to dimension specification</p> <p>Bars inset laterally by 45 mm</p> <p>Not available with stop diagrams 2L/2R, 3L/3R, 4</p> <p>Thermal expansion (bimetal effect)</p> <p>Drain holes at bottom of frame</p>

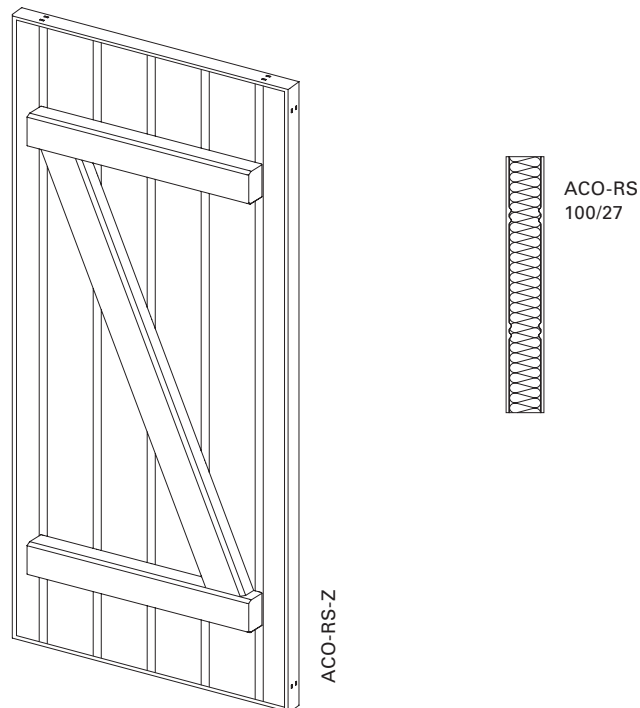


Frame profile

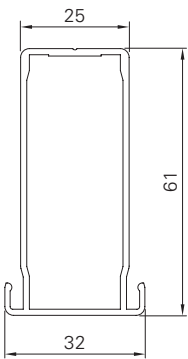


AR61-SE

Z-bar / Crossbar

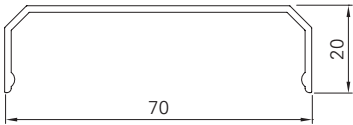

LZ

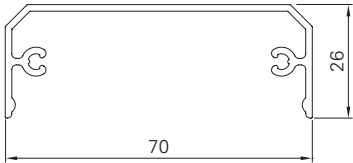

LQ

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Weight	Approx. 7 kg/m <sup>2</sup>
Frame profile	61 × 32 mm extruded aluminium profile
Centre	Polystyrene rigid foam board with double-sided aluminium sheeting plus vertical beading
Attachment	70 × 26 mm extruded aluminium profile (crossbar) 70 × 20 mm extruded aluminium profile (Z-bar)
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Electric drive   Basic frame   Pre-installation   Catch