



BEAUNE



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Electric drive is not possible in combination with special shapes Hardware packages type 3 + type 4 are possible If the outer slat section is < 65 mm due to the width of the sash, slat distribution is organised symmetrically Drain holes at bottom of frame

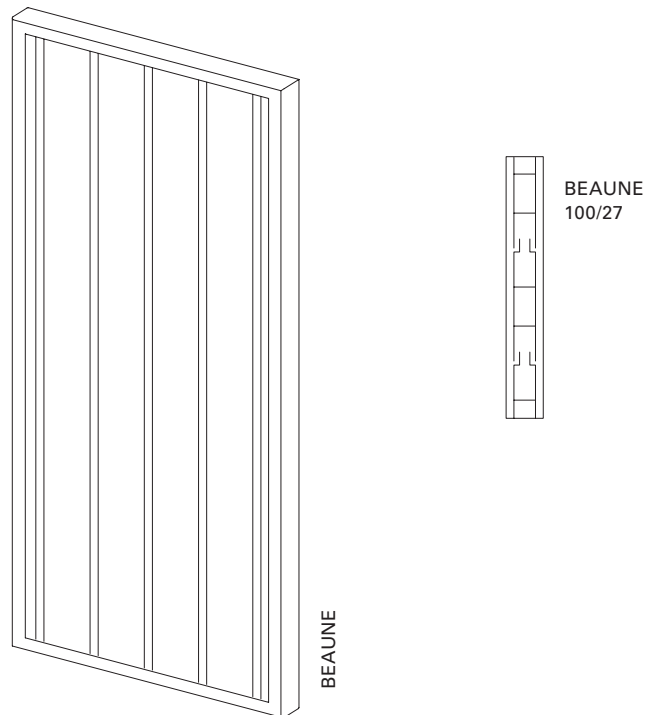


Centre

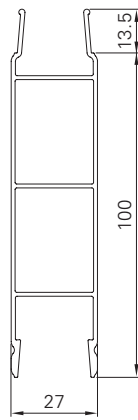

BL

Frame profile



R27

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2700 mm
Weight	Approx. 12 kg/m ²
Frame profile	27 × 32 mm extruded aluminium profile
Centre	100 × 27 mm extruded aluminium hollow chamber profile (visible area)
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Corner connections	Glued-in aluminium bracket
Options	Add-on lock Rabbet bead Electric drive Basic frame Frames Pre-installation Notching Special shapes (arched frame profile) Catch