



# CHUR-73



<b>Surface</b>	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
<b>Colours</b>	RAL Classic, RAL Design, NCS, VSR
<b>Finishes</b>	Wood, stone, rust
<b>Pretreatment</b>	Ocean Line Plus possible
<b>Notes</b>	<p>Distribution of horizontal cross-panel: 1/3 top, 1/3 centre, 1/3 bottom                      Division by dimensions specification possible (depending on distribution of slats)                      Slat end caps made of black or white plastic                      Slat with push rod connected by metal shaped part                      Inserts are exchangeable</p> <p>Drain holes at bottom of frame                      For technical reasons a different support frame is installed in combination with special shapes used at the top                      In the stop diagrams 2L, 2R, 3L, 3R and 4, the push rod must be adjusted 25 mm from its central position to the left and right respectively (shutter rod not possible)</p> <p>Structural height when adjustment lever is closed: 30 mm, open: 100 mm                      No electric drive and finish possible in combination with special shapes                      Floor locking only partially possible in combination with special shapes                      Opener can only be positioned in the centre panel                      When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323)</p>

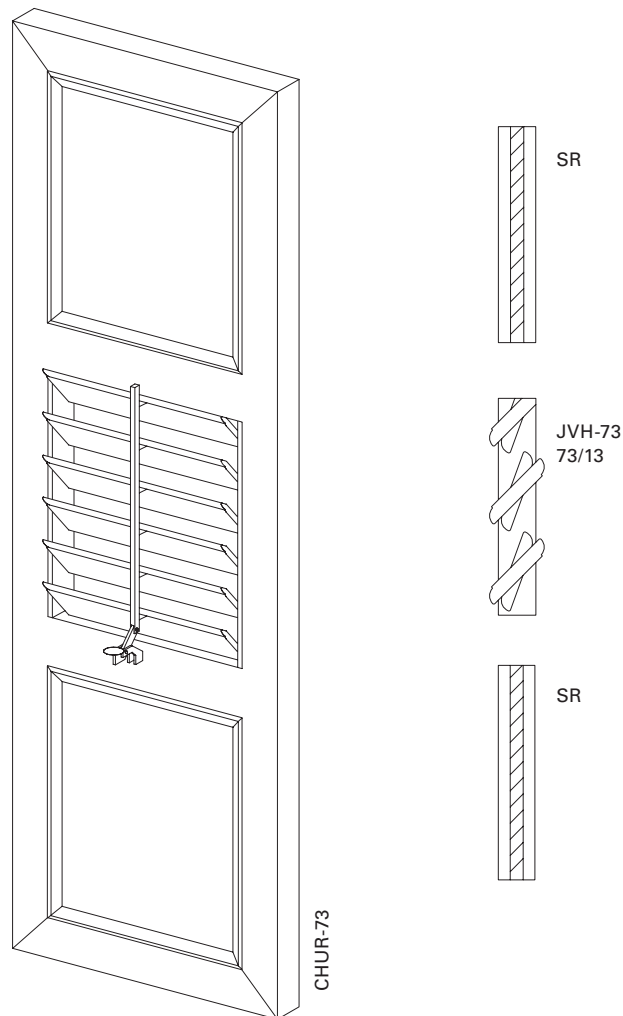

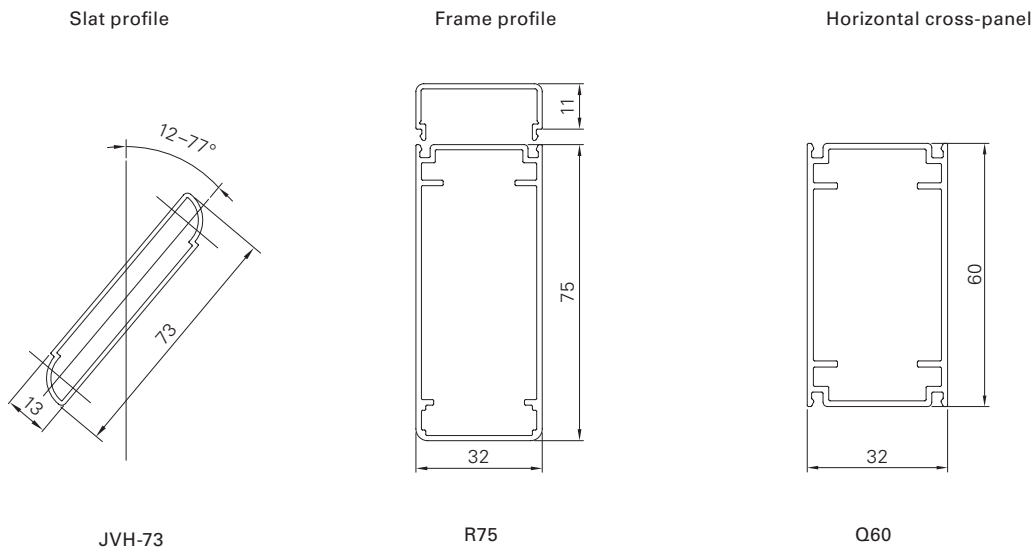

<b>Min./max. dimensions</b>	Width: 280 to 800 mm Height: 800 to 2500 mm
<b>Weight</b>	Approx. 9 kg/m <sup>2</sup>
<b>Frame profile</b>	75 × 32 mm extruded aluminium hollow chamber profile
<b>Slat profile</b>	73 × 13 mm extruded aluminium hollow chamber profile
<b>Slat carrier profile</b>	32 × 11 mm extruded aluminium profile
<b>Horizontal cross-panel profile</b>	60 × 32 mm extruded aluminium hollow chamber profile
<b>Centre</b>	Polystyrene rigid foam board with double-sided aluminium sheeting
<b>Adjustment</b>	Adjustable slats via central push rod lock with detent positions
<b>Stop bead</b>	Supplied loose, black or white rubber (depending on the sash colour)
<b>Corner connections</b>	Aluminium bracket, glued-in and additionally secured by plastic pins
<b>Options</b>	Notching   Add-on lock   Opener   Floor locking   Electric drive   Rabbet bead   Vertical cross-panel   Half-round arch (mounted)   Horizontal cross-panel   Inside opener crank   Frames   Slat end caps made of metal in sash colour   Rod lock   Pre-installation   Segmental arch, hollow (mounted)   Catch   Segmental arch, solid (mounted)   Special shapes (arched frame profile)   Easyflex