


CHUR

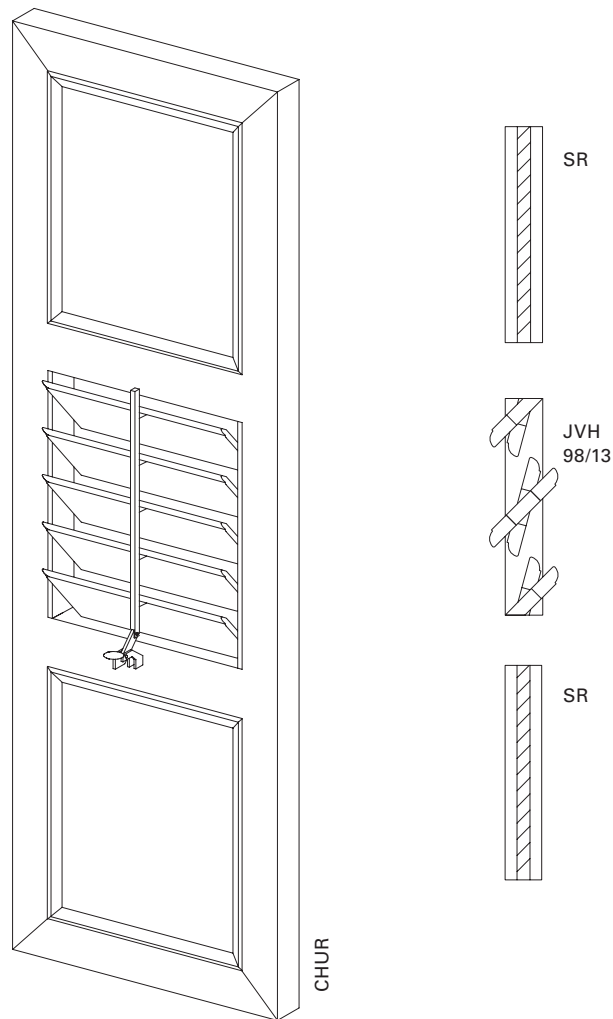

Surface Fine structure matt (standard), silk gloss, matt
Powder-coated 200 °C before assembly

Colours RAL Classic, RAL Design, NCS, VSR

Finishes Wood, stone, rust


Pretreatment Ocean Line Plus possible

Notes Distribution of horizontal cross-panel: 1/3 top, 1/3 centre, 1/3 bottom
Division by dimensions specification possible (depending on distribution of slats)
Slat end caps made of black or white plastic
Slat with push rod connected by metal shaped part
Inserts exchangeable
Drain holes at bottom of frame

For technical reasons a different support frame is installed in combination with special shapes used at the top
In the stop diagrams 2L, 2R, 3L, 3R and 4, the push rod must be adjusted 25 mm from its central position to the left and right respectively (shutter rod not possible)
Structural height when adjustment lever is closed: 30 mm, open: 100 mm

No electric drive and finish possible in combination with special shapes
Floor locking only partially possible in combination with special shapes
Opener can only be positioned in the centre panel
When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323)



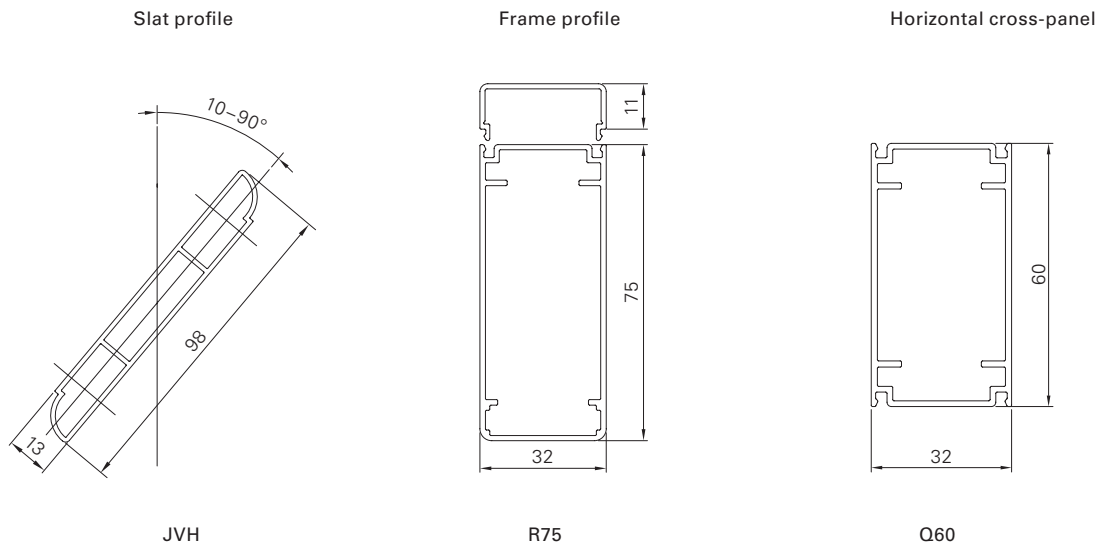

Min./max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Min./max. infeed	80,0–95,0 mm
Min./max. inclination angle	10–90°
Weight	Approx. 9 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Slat profile	98 × 13 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium profile
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile
Centre	Polystyrene rigid foam board with double-sided aluminium sheeting
Adjustment	Adjustable slats via central push rod lock with detent positions
Stop bead	Supplied loose, black or white rubber (depending on the sash colour)
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Notching Add-on lock Opener Floor locking Electric drive Rabbet bead Vertical cross-panel Half-round arch (mounted) Horizontal cross-panel Inside opener crank Frames Slat end caps made of metal in sash colour Rod lock Pre-installation Segmental arch, hollow (mounted) Catch Segmental arch, solid (mounted) Special shapes (arched frame profile) Easyflex