EHRET

MoveTronic

Electric folding sliding shutter

Order form and planning tool

Stop diagrams

Sash distribution

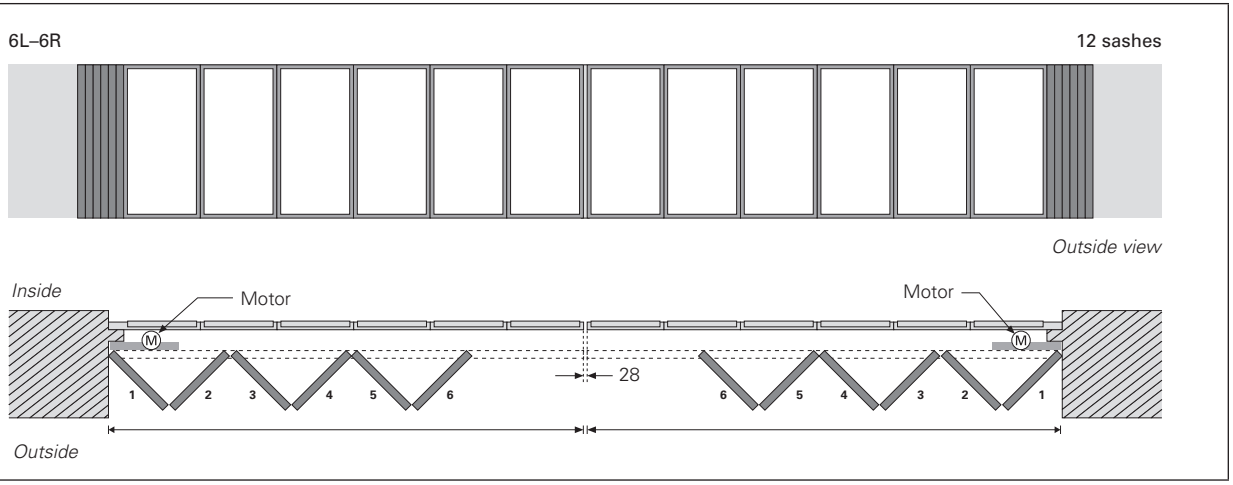

- All designs with an even number of sashes, up to a maximum of 6 per side, are possible.

The stop diagrams are sketched as if viewed from inside. The term 2L–4R stands for 2 sashes left (L) and 4 sashes right (R).

Ⓜ The drives are always positions on the opposing stop side!

Examples

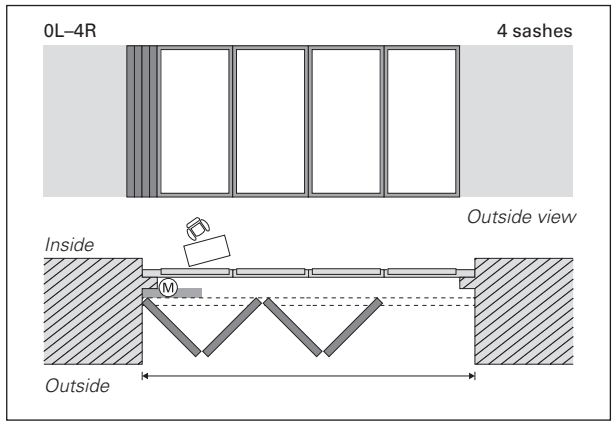

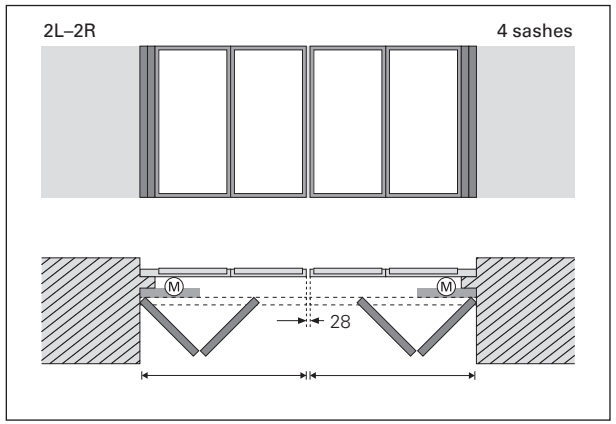

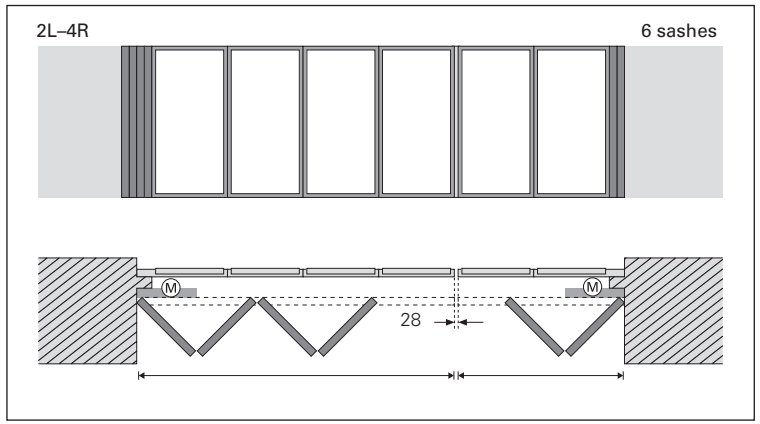

Measuring instructions | Horizontal section

- For two-sided schemes (L-R) two drive boxes are required!
- Center gap = 28 mm

MoveTronic
e.g. 2L–2R (symmetrical)

Clear width
– 5 mm (air on the left)
– 5 mm (air on the right)

= Passage width

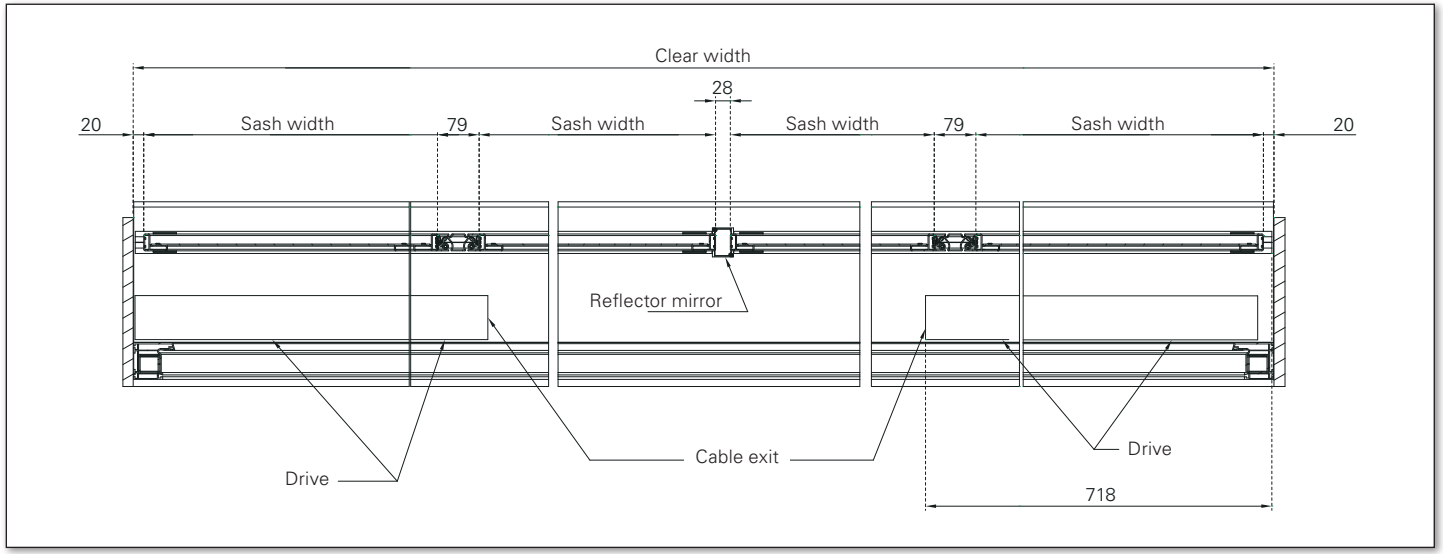

MoveTronic
e.g. 2L–3R (asymmetrical)

Clear width
– 5 mm (Luft links)
– 5 mm (air on the right)

= Passage width

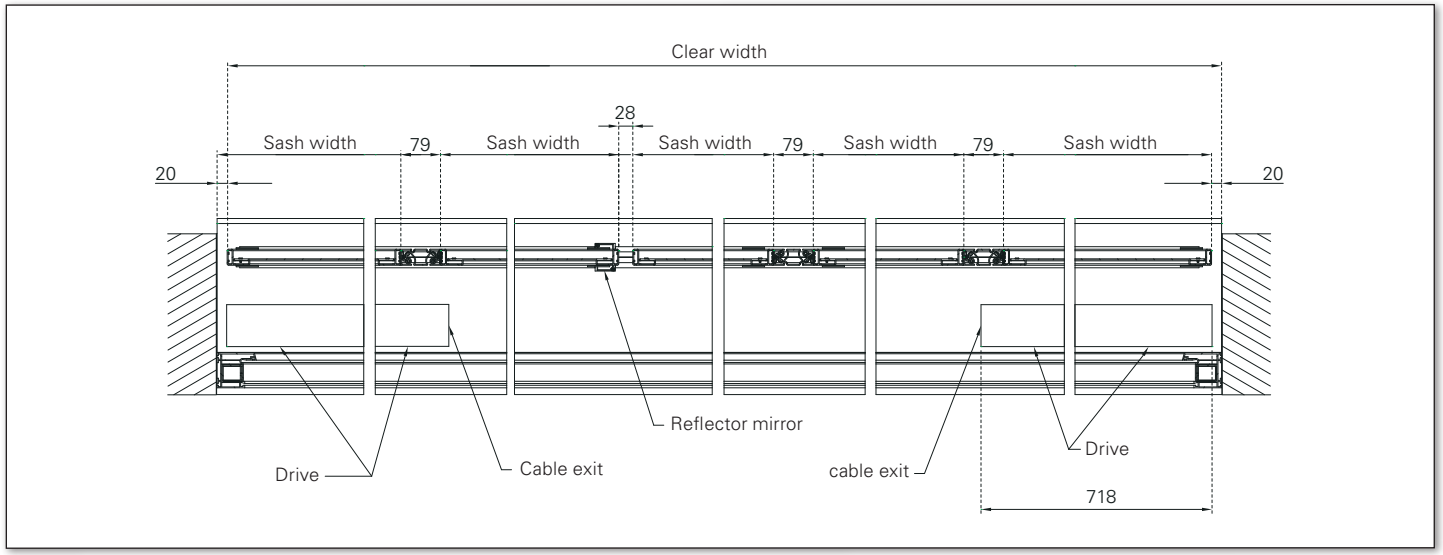

© 06.2023 EHRET GmbH | F34.E | Subject to technical modifications

Measuring instructions | Vertical section

Mounting type 1 | Header installation

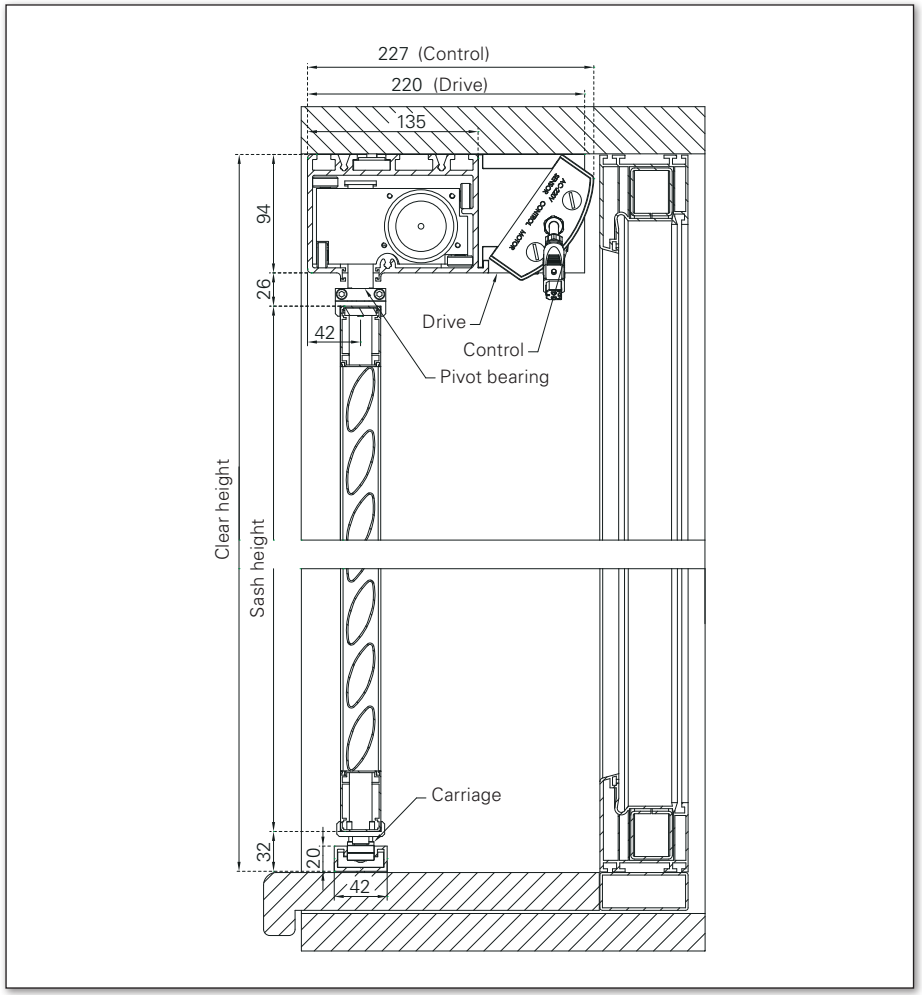

Mounting type 2 | Façade mounting

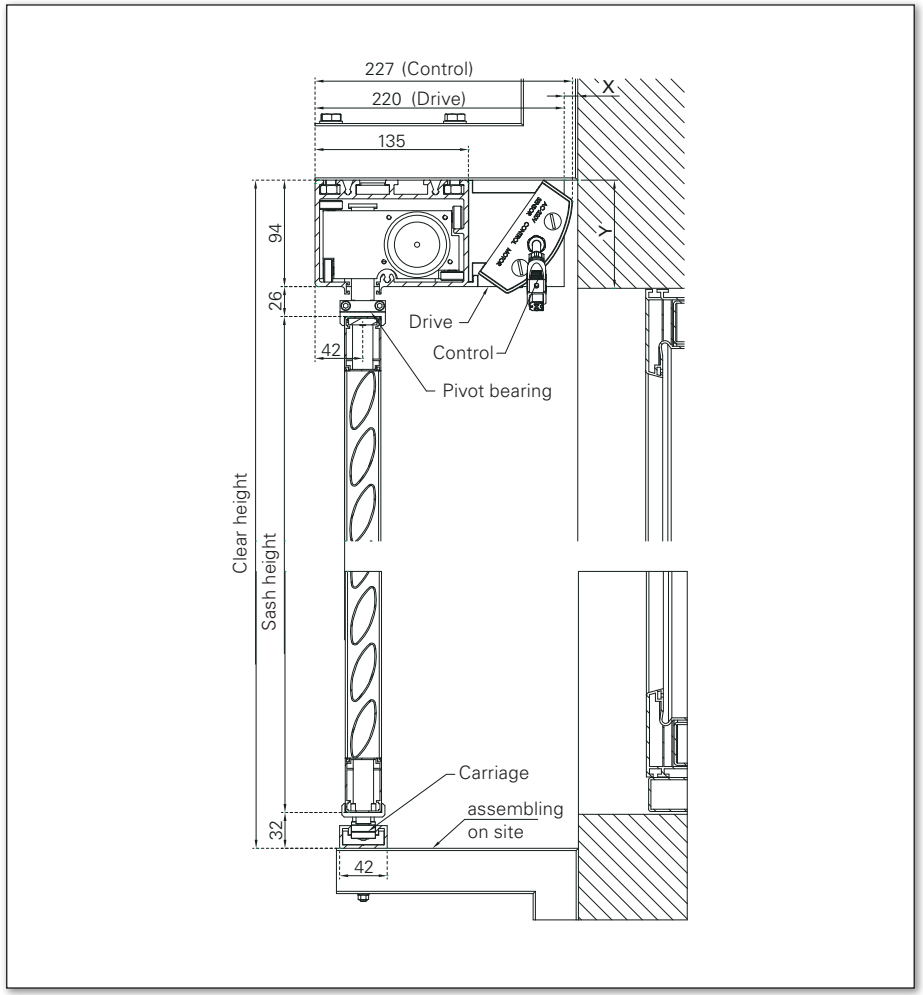

© 06.2023 EHRET GmbH | F34.E | Subject to technical modifications

Measuring instructions | System cross-section (package dimensions)

MoveTronic

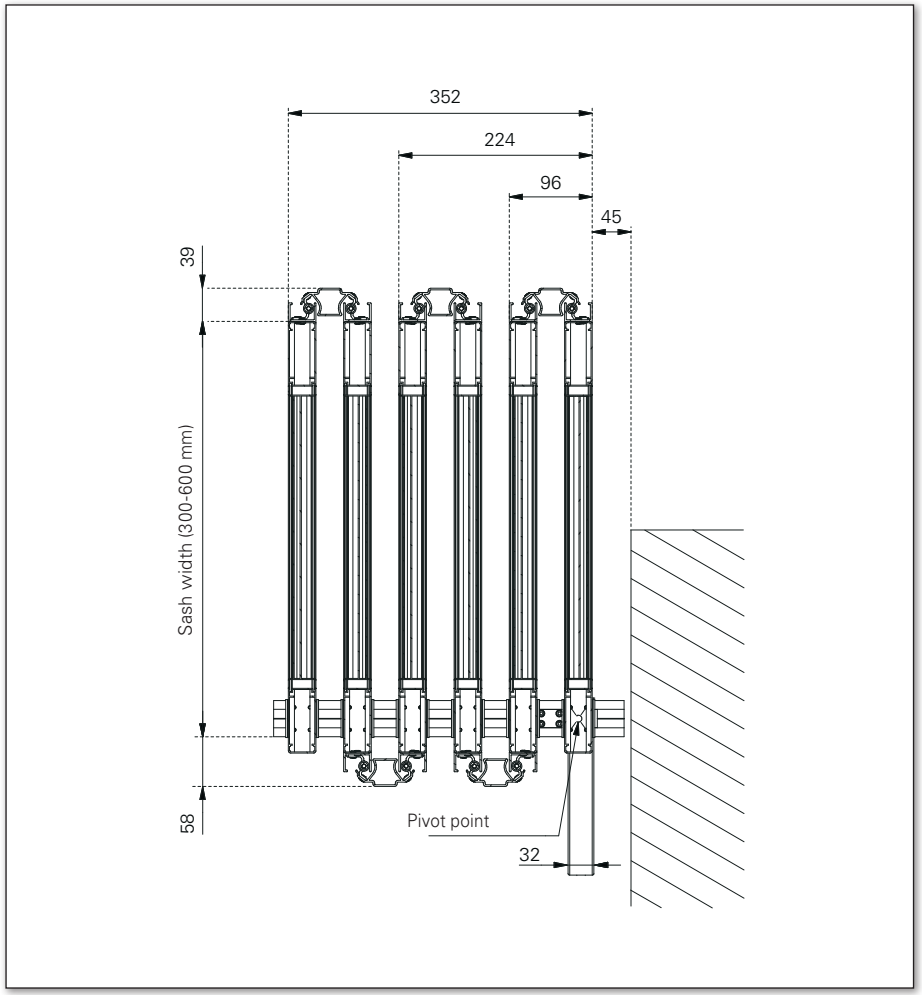

Variant A | Drive placed on the inside

Type 1 | left

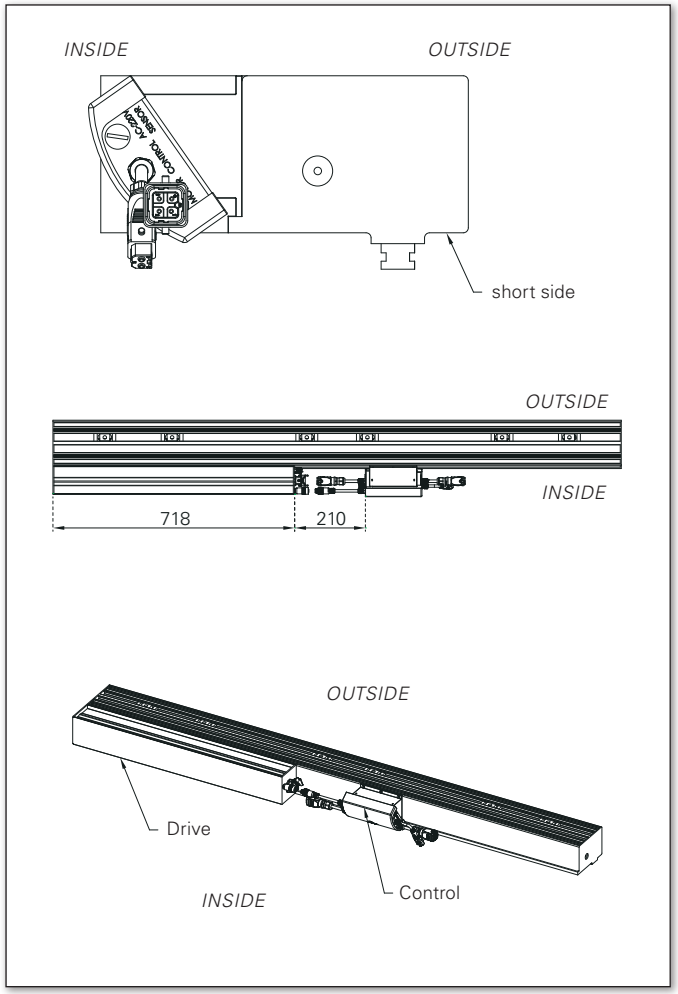

Type 2 | right

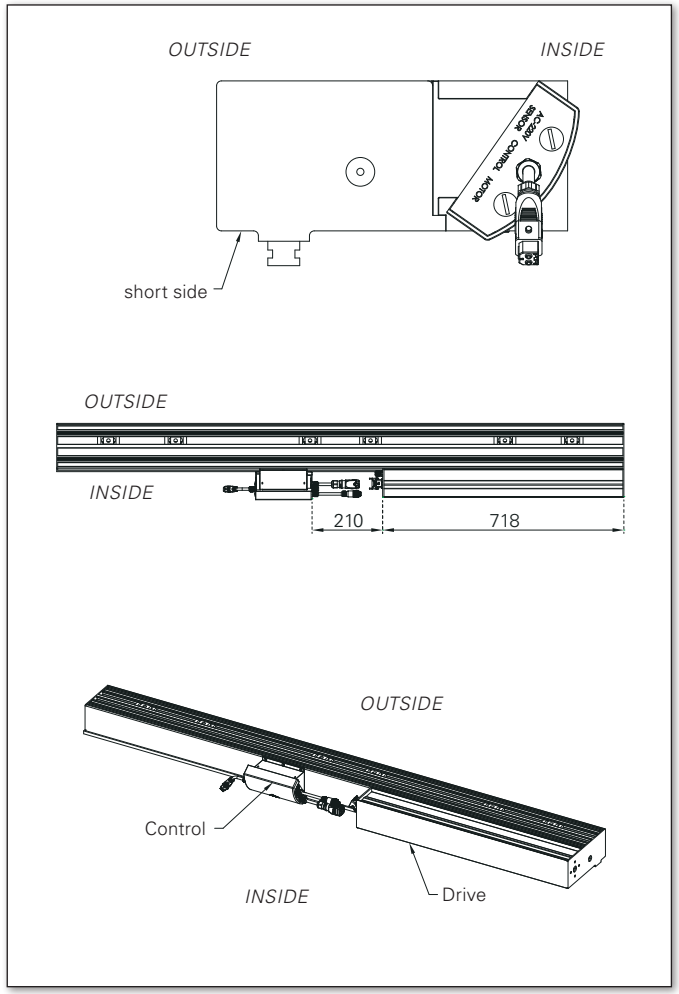

Type 3 | left and right

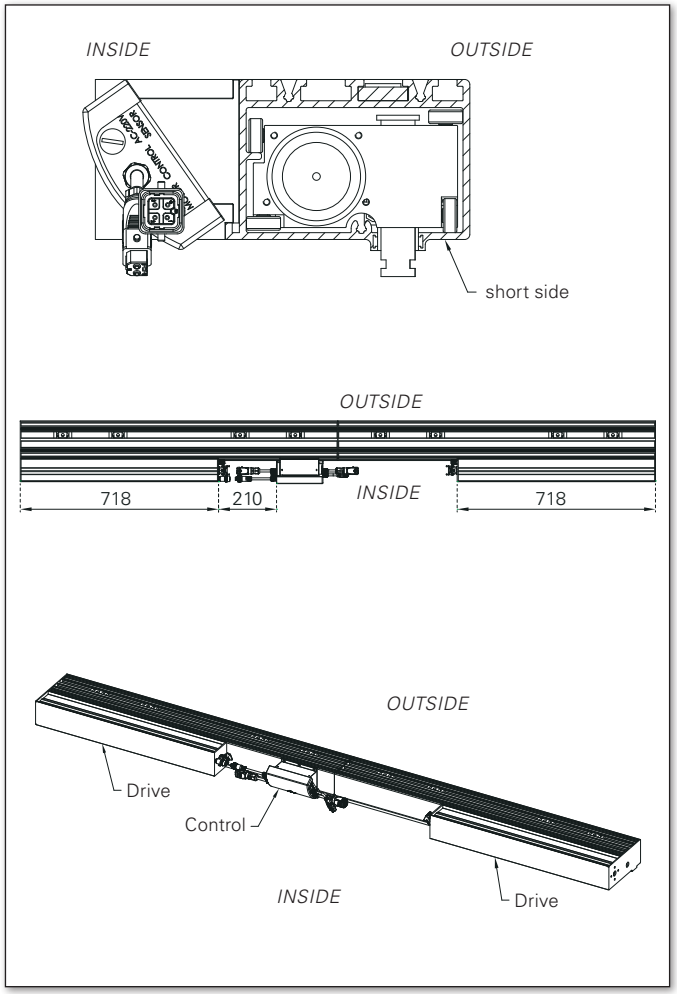

© 06.2023 EHRET GmbH | F34.E | Subject to technical modifications

Variant B | Drive placed on the outside

Caution:

- For variant B (drive placed on the outside), a distance of at least 30 mm must be maintained between the drive and the window!

Type 1 | left

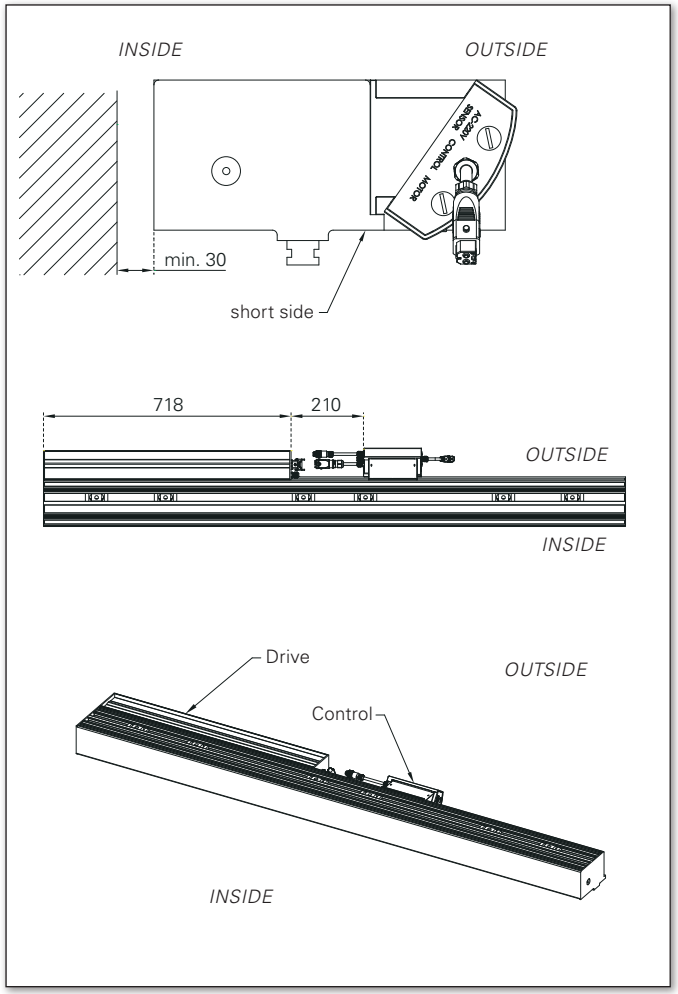

Type 2 | right

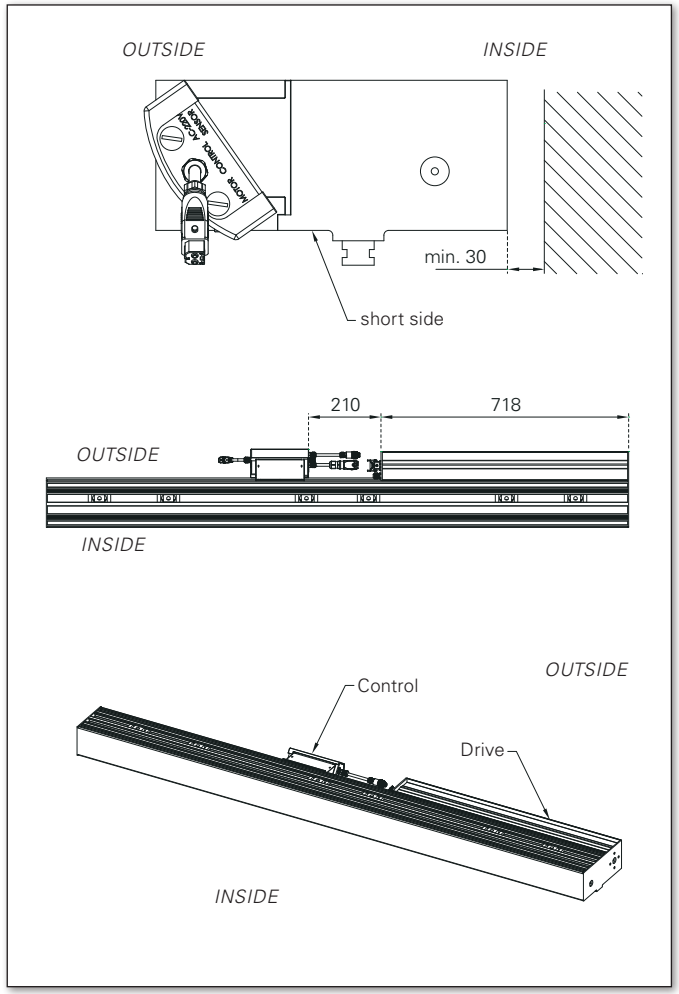

Type 3 | left and right

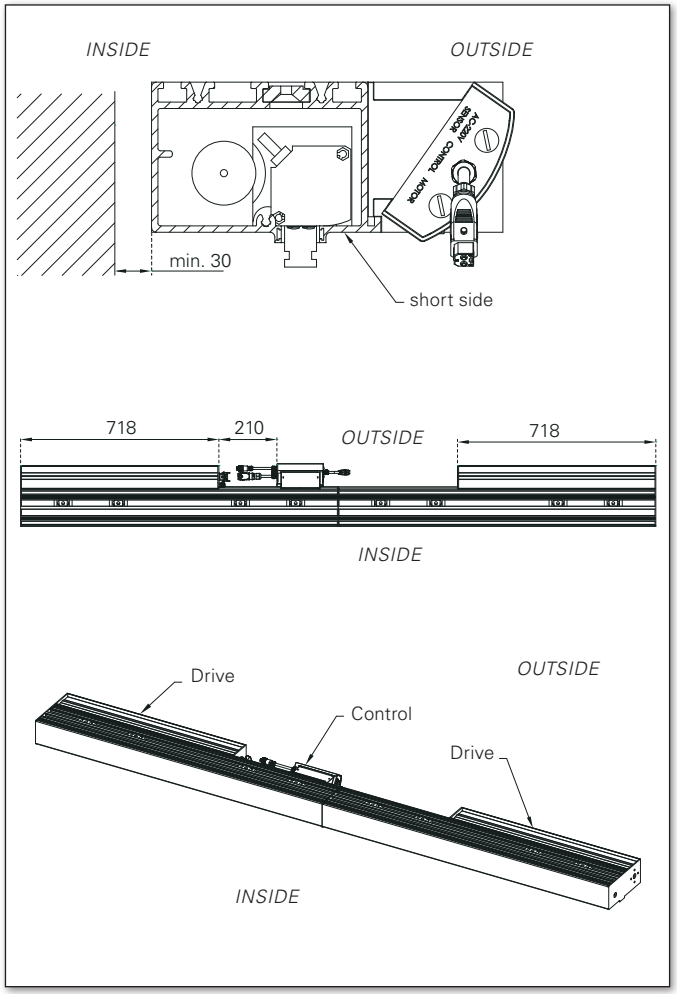

Measuring instructions | Sash models

Electric folding sliding shutter MoveTronic

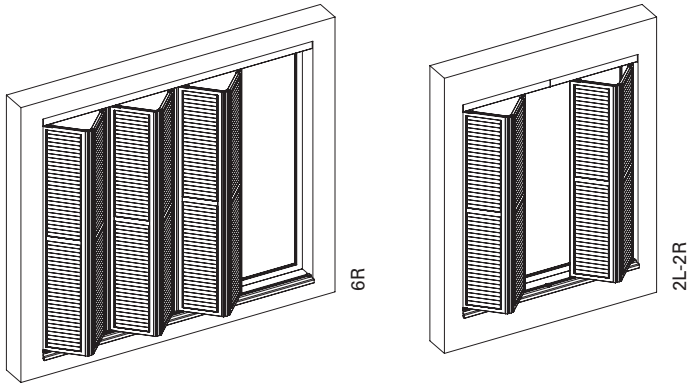

Controls



Remote control Nice Era P, wireless

1 channel	670090
6 channel	670091
18 channel	670092

Min./max. dimensions

Frame	Name of model	Width min.	Width max.	Height min.	Height max.	Horizontal cross-panel from height	Instead of horizontal cross-panel	Weight kg/m²	Horizontal cross-panel/vertical cross-panel
R75	JS	300	600	800	3000	2200	(1)	9	Q60
	MS	300	600	800	3000	2200	(1)	9	Q60
	PARIS	300	600	800	3000	2200	(2)	8	Q60
	SL-R75	300	600	800	3000	2200	(2)	9	Q60
	SUN-R75	300	600	800	3000	2200	(2)	9	Q60
TZ R75	TIZO	300	600	800	2500	1900	(1)	13	Q60
	TSW	300	600	800	3000	2200	-	13	Q60
	TZ	300	600	800	3000	1900	(1)	12	Q60
R48	JS	300	600	800	2500	1900	(1)	8	Q60
	MS	300	600	800	2500	1900	(1)	8	Q60
	PARIS	300	600	800	2500	1900	(2)	8	Q60
	SL-R48	300	600	800	2500	1900	(2)	9	Q60
	SUN-R48	300	600	800	2500	1900	(2)	9	Q60
SL 12	MATRICO	300	600	800	3000	-	-	9	-
	PLANO	300	600	800	3000	-	-	9	-
	VARIO	300	600	800	3000	-	-	9	-
	NATURE	300	600	800	3000	-	-	15	-

(1) Pin
(2) Screw slat

- All dimensions in mm | Frame depth max. 32 mm
- The maximum width of 600 mm applies generally!

Min./Max. dimensions drives:

- smallest drive length: 1150 mm (2L/2R)
- largest drive length: 7260 mm (6L-6R); one drive box per drive side of 3630 mm each; the bottom guide rail is split

© 06.2023 EHRET GmbH | F34.E | Subject to technical modifications

Order form | **MoveTronic** | Electric folding sliding shutter

☐ OFFER ☐ ORDER

Date Page of

Your address and signature

Your customer number

Your processor

Preferred delivery date

Ocean Line plus ☐ yes

Consignment

Sash model

Transmitter	*Wireless System*	*Quantity*
Handheld	☐ 1 channel	..... qty.
'Nice Era P'	☐ 6 channel	..... qty.
	☐ 18 channel	..... qty.
Wall switch	☐ 'Opla'	..... qty.
Connection to	☐ Smart Home / bus system	

	Surface	*Colour system*	*Colour no.*
Frame	☐ FSM	☐ RAL	
	☐ Finishes	☐ NCS	
	☐ Other	☐ VSR	
Insert	☐ FSM	☐ RAL	
	☐ Finishes	☐ NCS	
	☐ Other	☐ VSR	
MoveTronic Drive housing	☐ FSM	☐ RAL	
	☐ Other	☐ NCS	
		☐ VSR	
Guide rails + Accessories	☐ FSM	☐ RAL	
	☐ Other	☐ NCS	
		☐ VSR	

EHRET

Tel. +49 (0) 78 22/439-0
Fax +49 (0) 78 22/439-217
www.ehret.com

order by e-mail

request offer by e-mail

print order form

☐ Follow-up order

The original order no. must be specified in the event of follow-up deliveries:

Position	Number of elements	Number of sashes: on the left	Number of sashes: on the right	Diagram	Clear dimensions: Width	Clear dimensions: Height	Dimension Y	Header installation	Façade mounting	MoveTronic: Variant A *Drive placed on the inside*	MoveTronic: Variant B *Drive placed on the outside*	MoveTronic: Type 1 *left*	MoveTronic: Type 2 *right*	MoveTronic: Type 3 *left and right*	Sash, finished size *(to be completed by EHRET)*: Width	Sash, finished size *(to be completed by EHRET)*: Height	Miscellaneous
								☐	☐	☐	☐	☐	☐	☐			
								☐	☐	☐	☐	☐	☐	☐			
								☐	☐	☐	☐	☐	☐	☐			
								☐	☐	☐	☐	☐	☐	☐			
								☐	☐	☐	☐	☐	☐	☐			
								☐	☐	☐	☐	☐	☐	☐			
								☐	☐	☐	☐	☐	☐	☐			
								☐	☐	☐	☐	☐	☐	☐			
								☐	☐	☐	☐	☐	☐	☐			

© 06.2023 EHRET GmbH | F34.E

Date Page of | Consignment | Your customer number

Item	Additional information

© 06.2023 EHRET GmbH | F34.E

EHRET GmbH
Bahnhofstrasse 14-18
77972 Mahlberg, Germany
Tel. +49 (0) 78 22/439-0
Fax +49 (0) 78 22/439-116
www.ehret.com

Made in Germany
© 06.2023 EHRET GmbH | F27.E | Subject to technical modifications