



# GE



---

<b>Surface</b>	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
<b>Colours</b>	RAL Classic, RAL Design, NCS, VSR
<b>Finishes</b>	Wood, stone, rust
<b>Pretreatment</b>	Ocean Line Plus possible
<b>Notes</b>	Drain holes at bottom of frame

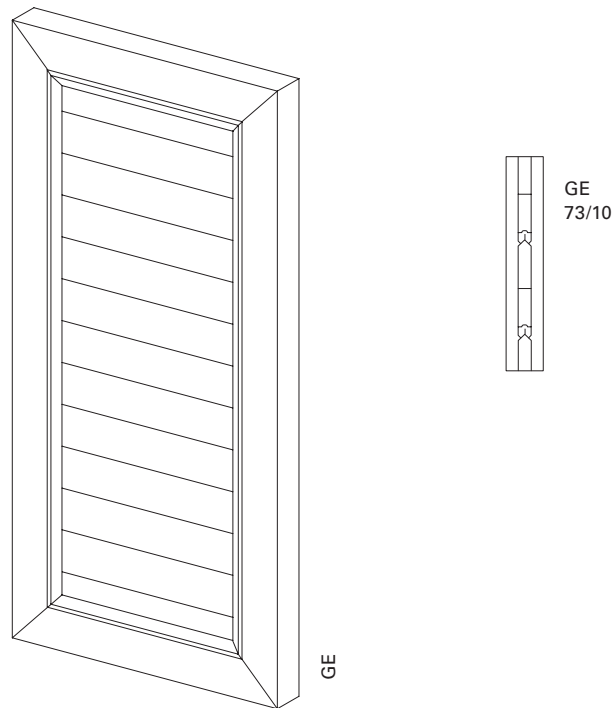

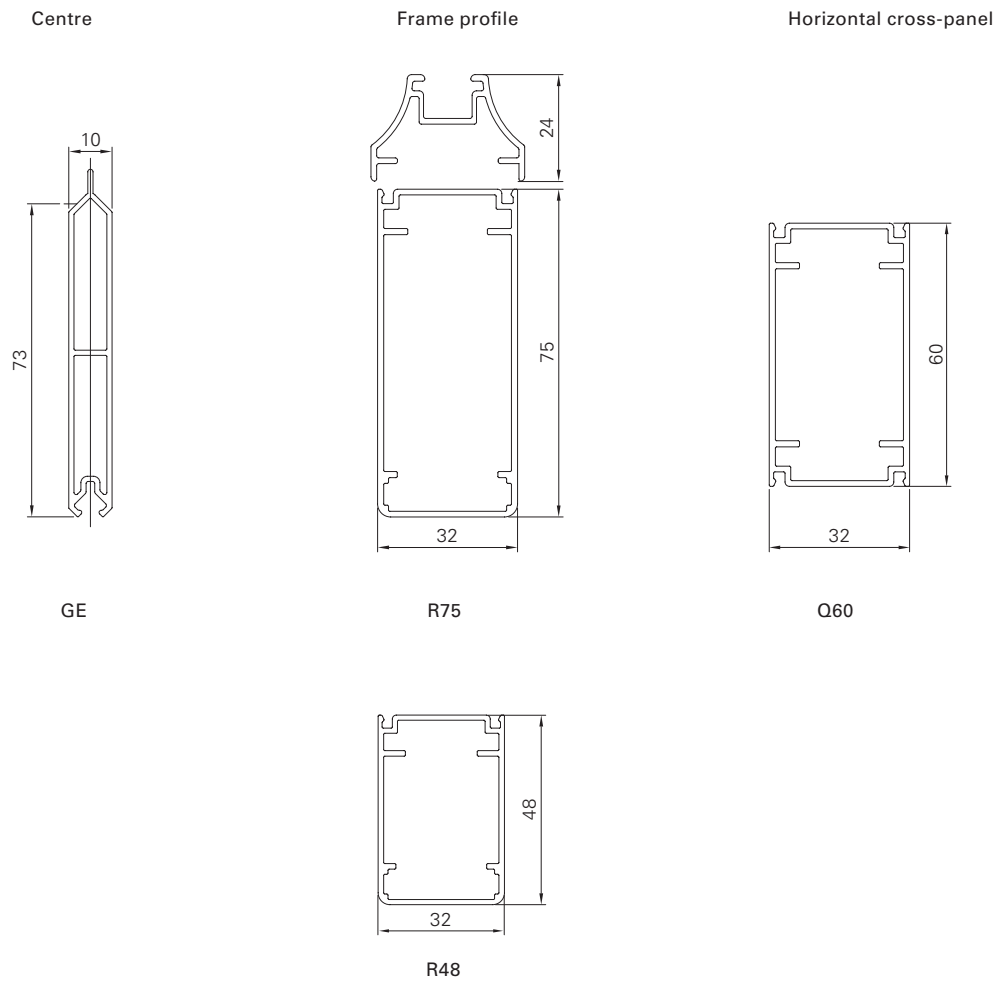

<b>Min./Max. dimensions</b>	Width: 225 to 600 mm Height: 800 to 2500 mm
<b>Weight</b>	Approx. 10 kg/m <sup>2</sup>
<b>Frame profile</b>	75 × 32 mm extruded aluminium hollow chamber profile
<b>Option R48</b>	48 × 32 mm extruded aluminium hollow chamber profile
<b>Centre</b>	73 × 10 mm extruded aluminium hollow chamber profile
<b>Clamp profile</b>	24 × 35 mm extruded aluminium hollow chamber profile
<b>Horizontal cross-panel</b>	60 × 32 mm extruded aluminium hollow chamber profile
<b>Corner connections</b>	Glued-in aluminium bracket with visible notch in the outer frame
<b>Options</b>	Pull catch   Turning lock   Pre-assembly   Gap and joint cover   Protection against flashover   Rail end stop   Arrester for shutter with bracket FSL-light   Motorisation MoveTronic