



GE-SE



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame

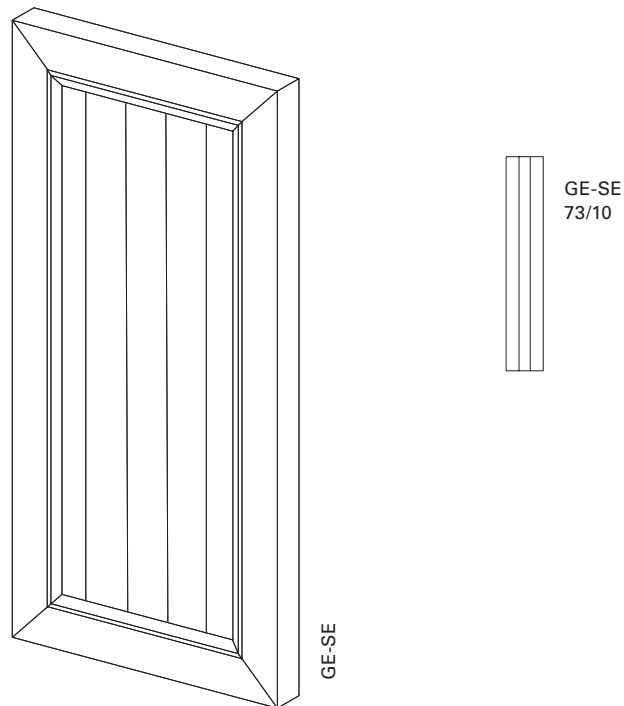

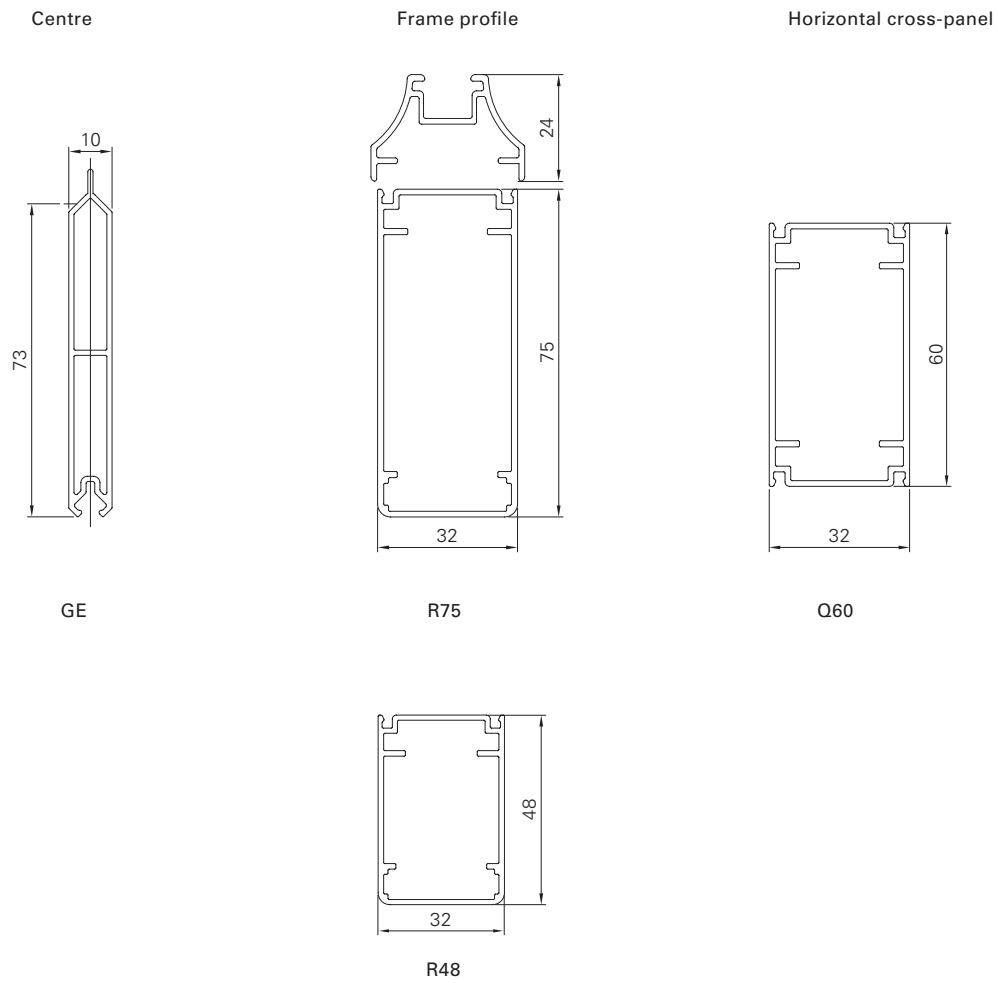

Min./Max. dimensions	Width: 225 to 600 mm Height: 800 to 2500 mm
Weight	Approx. 10 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Option R48	48 × 32 mm extruded aluminium hollow chamber profile
Centre	73 × 10 mm extruded aluminium hollow chamber profile
Clamp profile	24 × 35 mm extruded aluminium hollow chamber profile
Horizontal cross-panel	60 × 32 mm extruded aluminium hollow chamber profile
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Pull catch Turning lock Pre-assembly Gap and joint cover Protection against flashover Rail end stop Arrester for shutter with bracket FSL-light Motorisation MoveTronic