



# GE-SE



<b>Surface</b>	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
<b>Colours</b>	RAL Classic, RAL Design, NCS, VSR
<b>Finishes</b>	Wood, stone, rust
<b>Pretreatment</b>	Ocean Line Plus possible
<b>Notes</b>	Electric drive and finish are not possible in combination with special shapes When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323) With special shapes a different support frame is used for the insert for technical reasons  Upper corner connections are additionally secured by aluminium nails Rod locks cannot be exchanged Floor locking in combination with special shapes can only be installed to a limited extent  Drain holes at bottom of frame

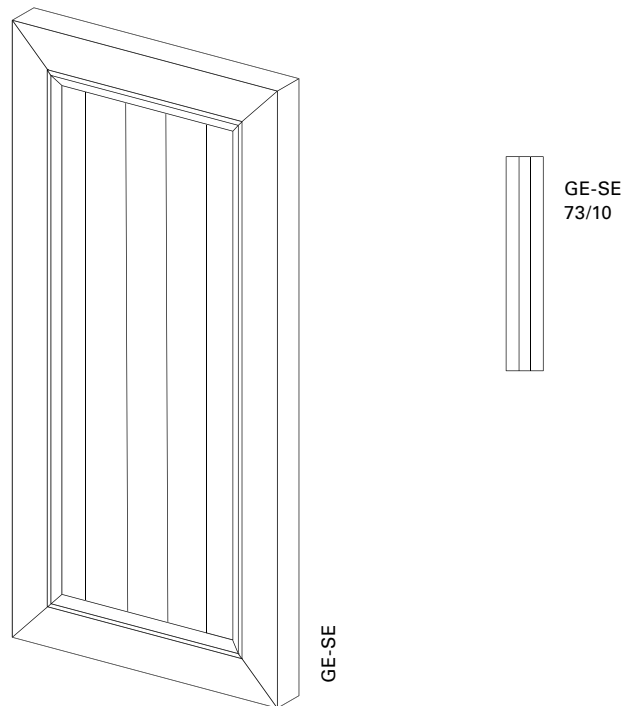

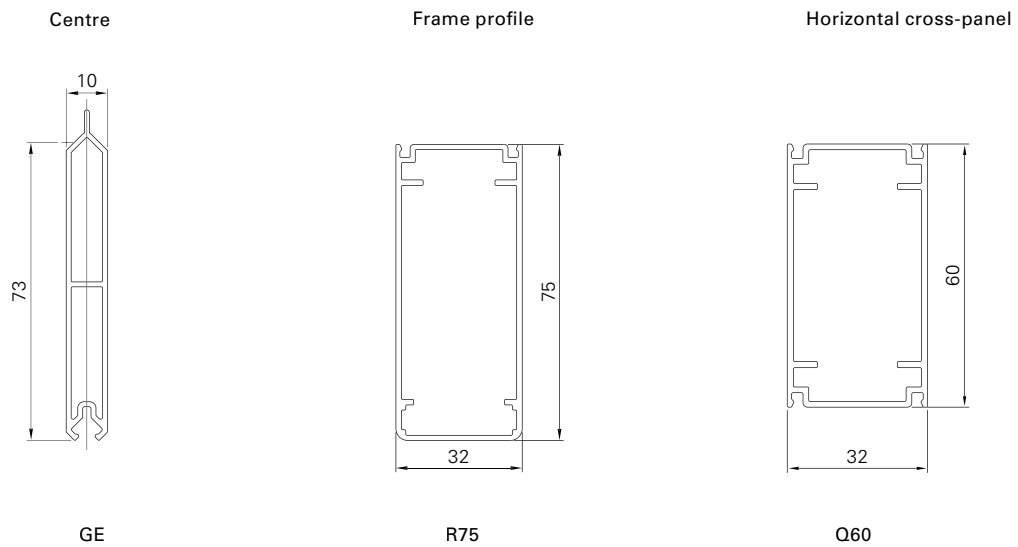

<b>Min./Max. dimensions</b>	Width: 280 to 800 mm Height: 800 to 2500 mm
<b>Weight</b>	Approx. 10 kg/m <sup>2</sup>
<b>Frame profile</b>	75 × 32 mm extruded aluminium hollow chamber profile
<b>Centre</b>	73 × 10 mm extruded aluminium hollow chamber profile
<b>Horizontal cross-panel</b>	60 × 32 mm extruded aluminium hollow chamber profile
<b>Stop bead</b>	Supplied loose, black or white rubber (depending on sash colour)
<b>Corner connections</b>	Aluminium bracket, glued-in and additionally secured by plastic pins
<b>Options</b>	Notching   Add-on lock   Opener   Floor locking   Electric drive   Rabbet bead   Easyflex Vertical cross-panel   Half-round arch (mounted)   Horizontal cross-panel   Inside opener crank   Frames   Basic frame   Rod lock   Segmental arch, hollow (mounted)   Pre-installation   Segmental arch, solid (mounted)   Catch   Special shapes (arched frame profile)