



GE-SE



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	<p>Electric drive and finish are not possible in combination with special shapes</p> <p>When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323)</p> <p>With special shapes a different support frame is used for the insert for technical reasons</p> <p>Upper corner connections are additionally secured by aluminium nails</p> <p>Rod locks cannot be exchanged</p> <p>Floor locking in combination with special shapes can only be installed to a limited extent</p> <p>Drain holes at bottom of frame</p>

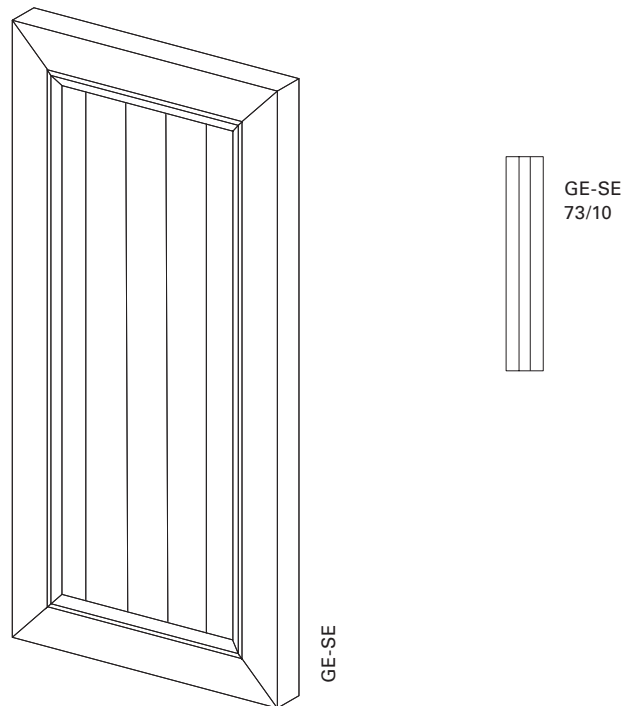

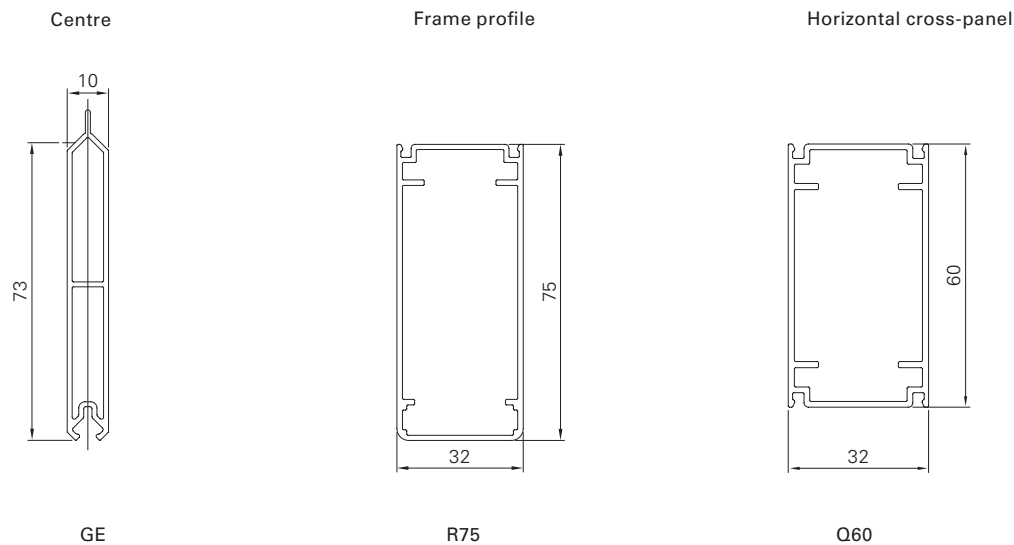

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Weight	Approx. 10 kg/m²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Centre	73 × 10 mm extruded aluminium hollow chamber profile
Horizontal cross-panel	60 × 32 mm extruded aluminium hollow chamber profile
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Notching Add-on lock Opener Floor locking Electric drive Rabbet bead Easyflex Vertical cross-panel Half-round arch (mounted) Horizontal cross-panel Inside opener crank Frames Basic frame Rod lock Segmental arch, hollow (mounted) Pre-installation Segmental arch, solid (mounted) Catch Special shapes (arched frame profile)