



JS-MAX37



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame Slats are exchangeable

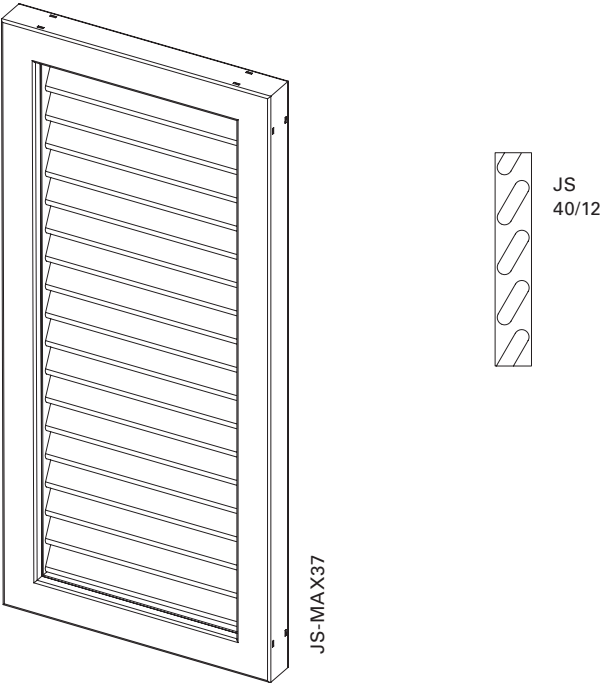


Slat profile




JS

Frame profile



MAX37

Horizontal cross-panel



Q60

Min./Max. dimensions	Width: 550 to 2200 mm Height: 800 to 3000 mm
Min./Max. infeed	33,0–36,7 mm
Inclination angle	25°
Weight	Approx. 11 kg/m ²
Frame profile	48 × 48 mm extruded aluminium hollow chamber profile
Slat profile	40 × 12 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium profile
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Vertical cross-panel Horizontal cross-panel Sliding shutter flush bolt Electric drive