




JVH-A



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	<p>Slat end caps made of black or white plastic Slat with push rod connected by plastic shaped part</p> <p>In a horizontal cross-panel, push rod runs throughout In the stop diagrams 2L/2R, 3L/3R, 4 the push rod must be adjusted 25 mm from its central position to the left and right respectively (shutter rod not possible in these cases)</p> <p>Structural height when adjustment lever is closed: 30 mm, open: 100 mm Observe where the lock is positioned on doors to ensure more convenient use and possibly even consider other models such as the BERN-73 model, for example. The field of slats should be closed when opening the shutters.</p> <p>Drain holes at bottom of frame French shutter holder only possible to a limited extent</p>

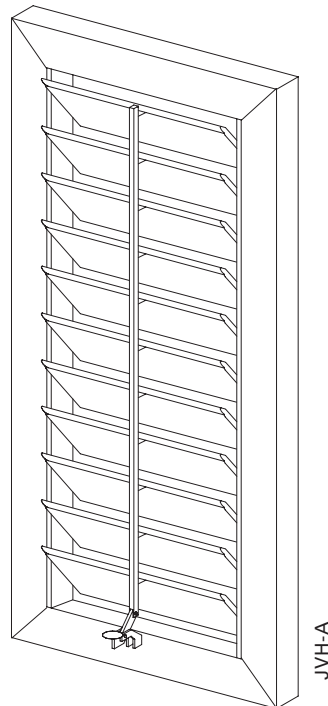

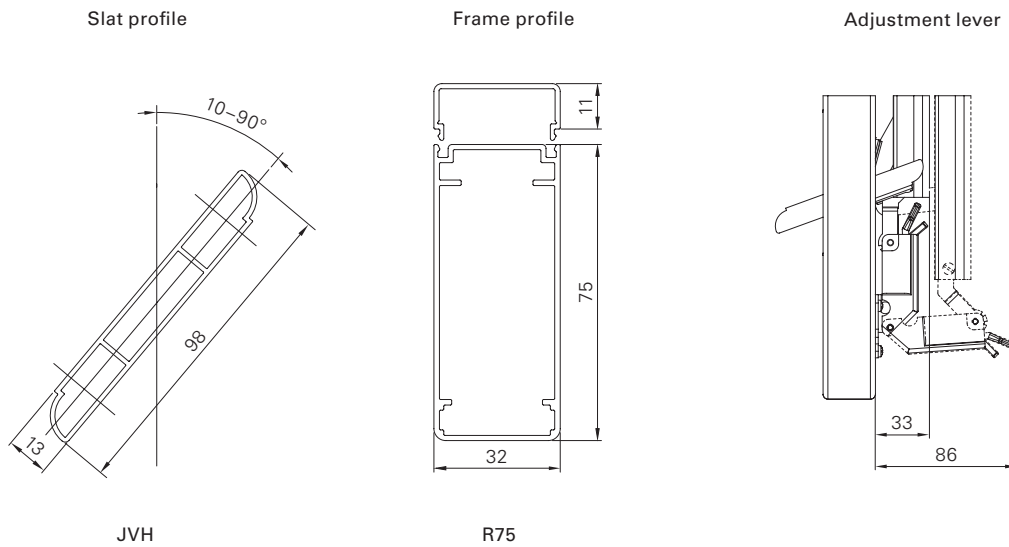

Min./max. dimensions Width: 280 to 800 mm
 Height: 800 to 2500 mm

Min./max. infeed 80,0–95,0 mm
Min./max. inclination angle 10–90°
Weight Approx. 11 kg/m²

Frame profile 75 × 32 mm extruded aluminium hollow chamber profile
Slat profile 98 × 13 mm extruded aluminium
Slat carrier profile 32 × 11 mm extruded aluminium profile

Adjustment Adjustable slats via central push rod lock with detent positions
Stop bead Supplied loose, black or white rubber (depending on the sash colour)

Corner connections Aluminium bracket, glued-in and additionally secured by plastic pins

Options Notching | Add-on lock | Electric drive | Floor locking | Rabbet bead | Half-round arch (mounted) | Inside opener crank
 | Vertical cross-panel | Segmental arch, hollow (mounted) | Horizontal cross-panel | Segmental arch, solid (mounted) |
 Rod lock | Push rod adjustment | Pre-installation | Frames | Catch | Easyflex