
## **MATRICO-MAX28**

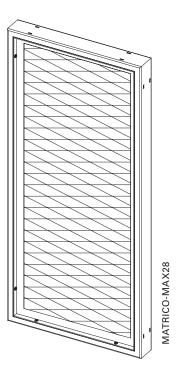

Surface Fine structure matt (standard), silk gloss, matt

Powder-coated 200 °C before assembly

Colours RAL Classic, RAL Design, NCS, VSR

Finishes (frame) Wood, stone, rust

Notes Model only on request;

The method of fastening differs depending on the mesh size of the extending mesh grid,

therefore the models can vary visually

Drain holes at bottom of frame













Centre

## Frame profile





MATRICO

MAX28

Min./Max. dimensions Width: 550 to 1500 mm

Height: 800 to 3000 mm

Weight Approx. 10 kg/m<sup>2</sup>

Frame profile  $48 \times 48 \text{ mm}$  extruded aluminium hollow chamber profile

Fastening profile  $30 \times 10 \times 2$  mm extruded square tube (with extending mesh grid with small mesh size)

Centre Extending mesh grid A in accordance with specifications

Corner connections Glued-in aluminium bracket with visible notch in the outer frame

Options Electric drive