
## **MATRICO**

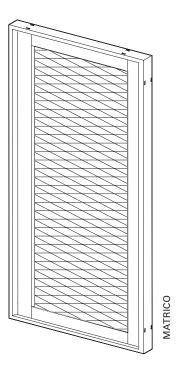

Surface Fine structure matt (standard), silk gloss, matt

Powder-coated 200 °C before assembly

Colours RAL Classic, RAL Design, NCS, VSR

Finishes (frame) Wood, stone, rust

Notes Model only on request

The method of fastening differs depending on the mesh size of the extending mesh grid,

therefore the models can vary visually

Drain holes at bottom of frame













Centre

## Frame profile





MATRICO

SL

Min./Max. dimensions Width: 550 to 1250 mm

Height: 800 to 3000 mm

Weight Approx. 9 kg/m²

Frame profile  $45 \times 32 \text{ mm}$  extruded aluminium hollow chamber profile

Fastening profile  $30 \times 10 \times 1.5 \text{ mm}$  extruded square tube

(with extending mesh grid with small mesh size)

Corner connections Glued-in aluminium bracket with visible notch in the outer frame

Options Electric drive