



# MS-R48



<b>Surface</b>	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
<b>Colours</b>	RAL Classic, RAL Design, NCS, VSR
<b>Finishes</b>	Wood, stone, rust
<b>Pretreatment</b>	Ocean Line Plus possible
<b>Notes</b>	Electric drive and finish are not possible in combination with special shapes Drain holes at bottom of frame Slats are exchangeable

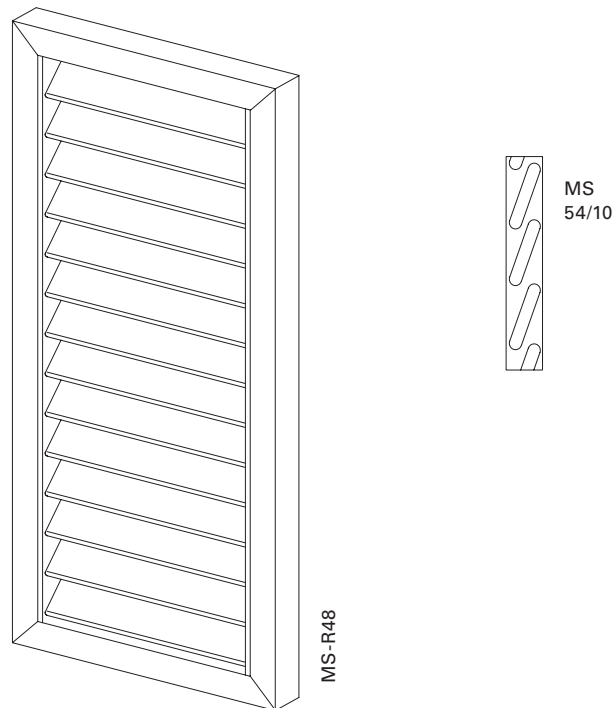


Slat profile



MS

Frame profile

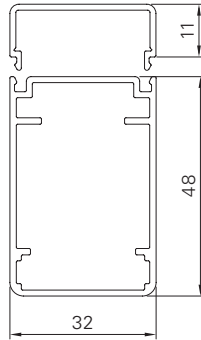

R48

<b>Min./Max. dimensions</b>	Width: 280 to 800 mm Height: 800 to 2500 mm
<b>Min./max. infeed</b>	46,0–51,5 mm
<b>Inclination angle</b>	15°
<b>Weight</b>	Approx. 6 kg/m <sup>2</sup>
<b>Frame profile</b>	48 × 32 mm extruded aluminium hollow chamber profile
<b>Slat profile</b>	54 × 10 mm extruded aluminium hollow chamber profile
<b>Slat carrier profile</b>	32 × 11 mm extruded aluminium
<b>Stop bead</b>	Supplied loose, black or white rubber (depending on sash colour)
<b>Corner connections</b>	Aluminium bracket, glued-in and additionally secured by plastic pins
<b>Options</b>	Notching   Electric drive   Rabbit bead   Vertical cross-panel   Half-round arch (mounted)   Horizontal cross-panel   Inside opener crank   Basic frame   Pre-installation   Segmental arch, hollow (mounted)   Catch   Segmental arch, solid (mounted)   Frames   Special shapes (arched frame profile)