



MSV



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Slat end caps made of black plastic Slats are exchangeable For technical reasons, a horizontal cross-panel is required from a sash height of 1900 mm; upper slat panel is moveable, lower slat panel is fixed Structural height of adjustment lever approx. 30 mm – please observe in regard to cranking Drain holes at bottom of frame

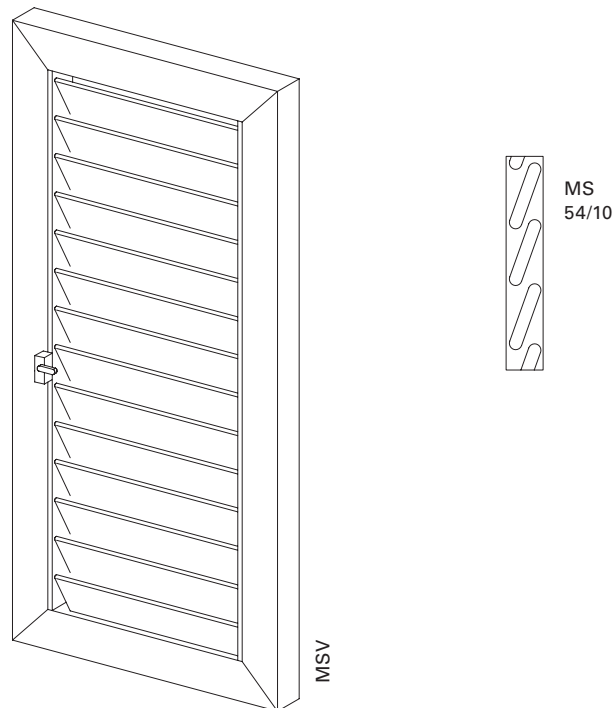


Slat profile




MS

Frame profile

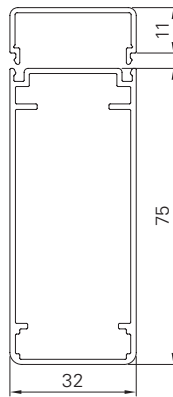

R75

Horizontal cross-panel



Q60

Min./max. dimensions Width: 280 to 800 mm
 Height: 800 to 2500 mm

Min./max. infeed 48,0–50,0 mm

Min./max. inclination angle 12–75°

Weight Approx. 6 kg/m²

Frame profile 75 × 32 mm extruded aluminium hollow chamber profile

Slat profile 54 × 10 mm extruded aluminium hollow chamber profile

Slat carrier profile 32 × 11 mm extruded aluminium

Horizontal cross-panel profile 60 × 32 mm extruded aluminium hollow chamber profile

Adjustment Adjustable slats via lateral swivel lever lock with detent positions

Stop bead Supplied loose, black or white rubber (depending on the sash colour)

Corner connections Aluminium bracket, glued-in and additionally secured by plastic pins

Options Notching | Floor locking | Electric drive | Rabbet bead | Vertical cross-panel | Half-round arch (mounted) | Horizontal cross-panel | Inside opener crank | Rod lock | Basic frame | Pre-installation | Segmental arch, hollow (mounted) | Catch | Segmental arch, solid (mounted) | Frames | Additional adjustable slat panel | Easyflex