



MSV-VISP (-SE)



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	<p>Distribution of horizontal cross-panel: 1/3 top, 1/3 centre, 1/3 bottom Division by dimensions specification possible (depending on distribution of slats) Slat end caps made of black plastic Inserts are exchangeable</p> <p>Drain holes at bottom of frame For technical reasons a different support frame is installed in combination with special shapes used at the top Structural height of adjustment lever approx. 30 mm – please observe in regard to cranking Electric drive and finish are not possible in combination with special shapes</p> <p>Opener can only be positioned in the centre panel When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323) Floor locking in combination with special shapes can only be installed to a limited extent</p>

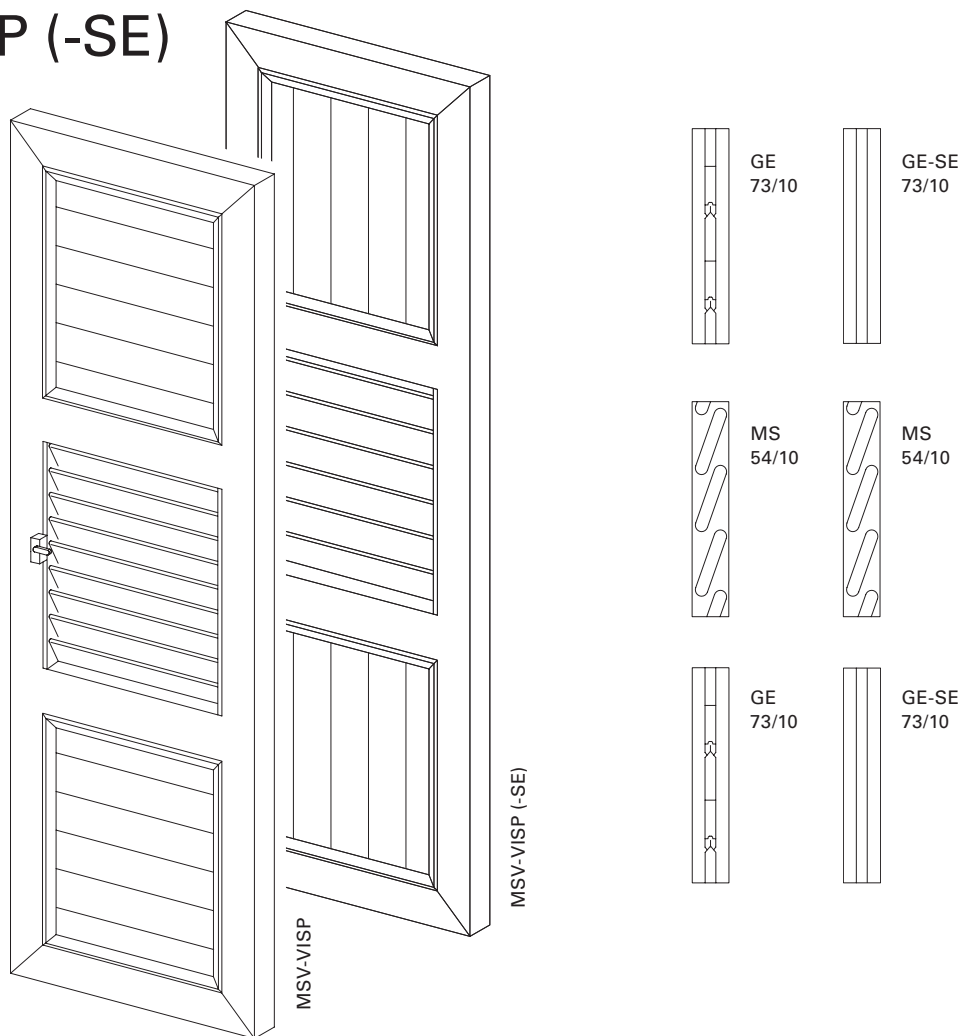

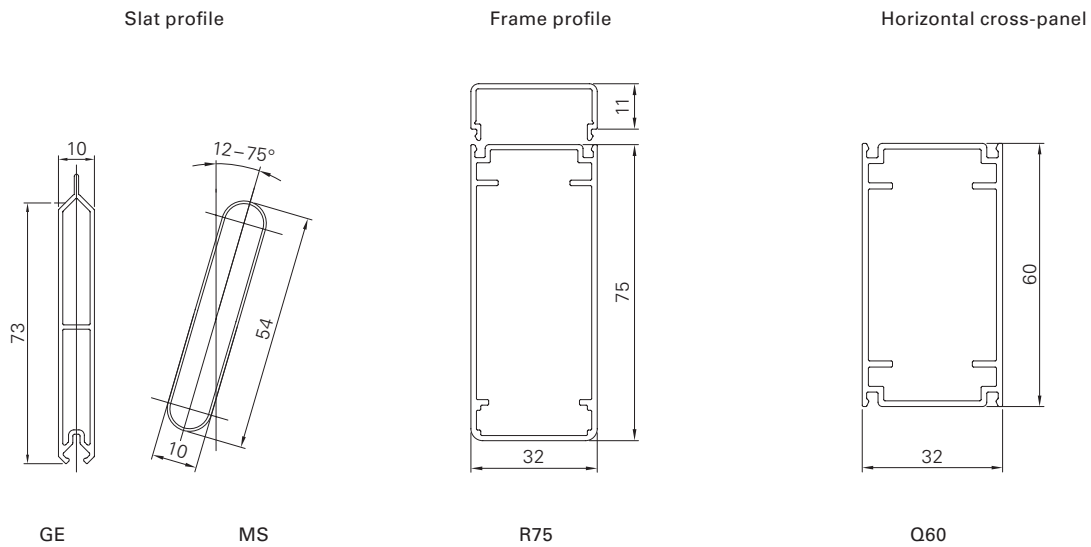

Min./max. dimensions Width: 280 to 800 mm
 Height: 800 to 2500 mm

Min./max. infeed 48,0–50,0 mm
Min./max. inclination angle 12–75°
Weight Approx. 9 kg/m²

Frame profile 75 × 32 mm extruded aluminium hollow chamber profile
Slat profile 54 × 10 mm extruded aluminium hollow chamber profile
Slat carrier profile 32 × 11 mm extruded aluminium profile
Horizontal cross-panel profile 60 × 32 mm extruded aluminium hollow chamber profile
Centre 73 × 10 mm extruded aluminium hollow chamber profile

Adjustment Adjustable slats via lateral swivel lever lock with detent positions
Stop bead Supplied loose, black or white rubber (depending on the sash colour)

Corner connections Aluminium bracket, glued-in and additionally secured by plastic pins

Options Notching | Add-on lock | Opener | Floor locking | Electric drive | Rabbet bead | Vertical cross-panel | Half-round arch (mounted) | Horizontal cross-panel | Inside opener crank | Frames | Basic frame | Rod lock | Segmental arch, hollow (mounted) | Pre-installation | Segmental arch, solid (mounted) | Catch | Special shapes (arched frame profile) | Easyflex