



# NATURE-MAX15



Surface	Solid wood slat, planed Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Type of wood	Siberian larch
Colours	Colours available on request and in accordance with order placement once a sample has been produced and approved
Pretreatment	Untreated; Glazed slats on request
Notes	A support profile is required for widths greater than 801 mm When the height exceeds 2200 mm, the slats are screwed to the inside of the frame to act as a horizontal cross-panel The considerable weight must be taken into consideration when preparing assembly

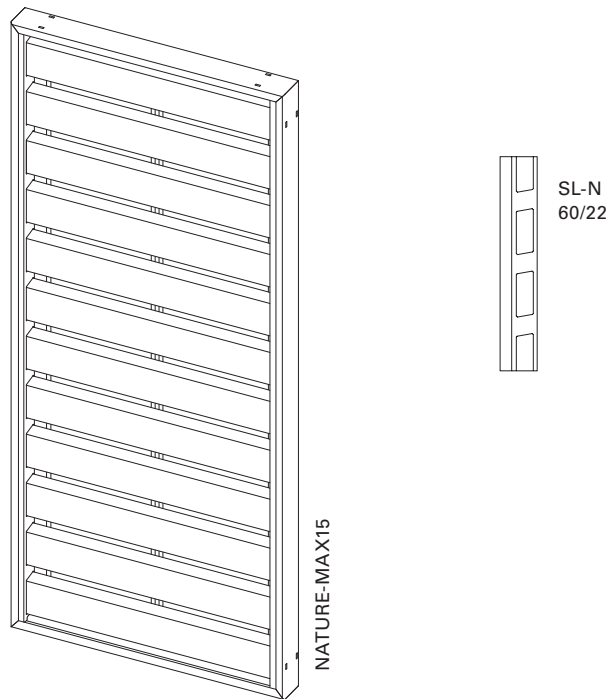


Slat profile




SL-N60

Frame profile



MAX15

Support profile



SP

<b>Min./Max. dimensions</b>	Width: 550 to 1600 mm Height: 800 to 3000 mm
<b>Min./Max. infeed</b>	Approx. 70,0–80,0 mm
<b>Weight</b>	Approx. 16 kg/m <sup>2</sup>
<b>Frame profile</b>	48 × 48 mm extruded aluminium hollow chamber profile
<b>Slat profile</b>	60 × 22 mm solid wood slat
<b>Slat carrier profile</b>	32 × 11 mm extruded aluminium profile
<b>Support profile</b>	20 × 5 mm extruded aluminium hollow chamber profile
<b>Corner connections</b>	Glued-in aluminium bracket with visible notch in the outer frame
<b>Options</b>	Electric drive