



NATURE-SL12-S



Surface	Solid wood slat, planed Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Type of wood	Siberian larch
Colours	Colours available on request and in accordance with order placement once a sample has been produced and approved
Pretreatment	Untreated; Glazed slats on request
Notes	A horizontal cross-panel is required for heights greater than 901 mm The considerable weight must be taken into consideration when preparing assembly

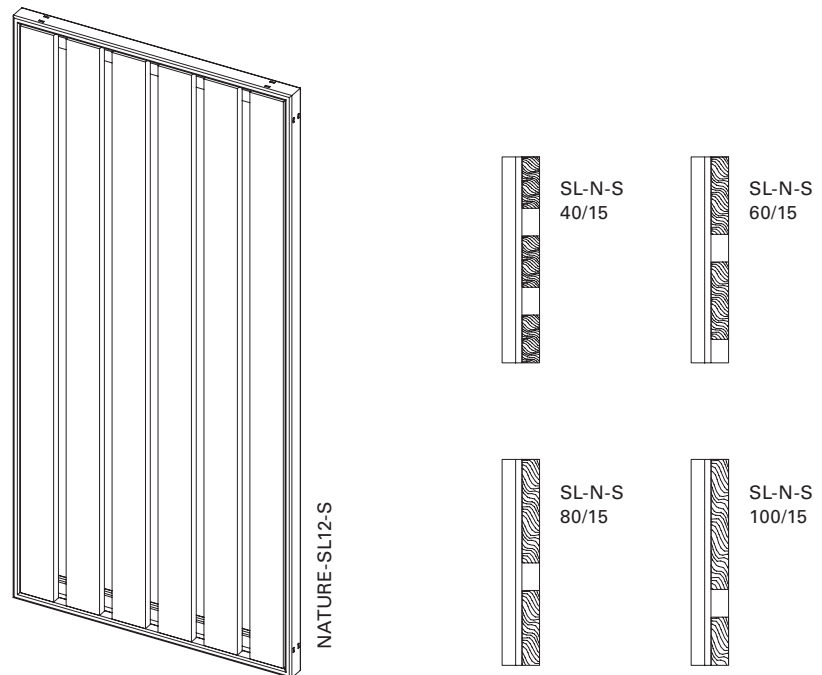

Slat profile

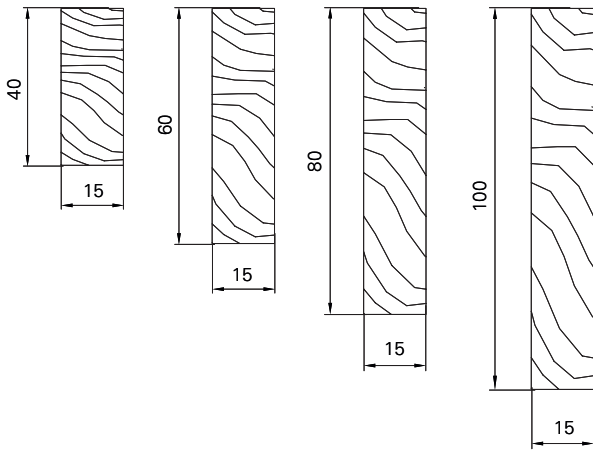


SL-N40-S

SL-N60-S

SL-N80-S

SL-N100-S

Frame profile



SL12

Min./Max. dimensions	Width: 225 to 600 mm Height: 800 to 2500 mm
Min./Max. infeed	Approx. 70,0–80,0 mm
Weight	Approx. 15 kg/m ²
Frame profile	45 × 32 mm extruded aluminium hollow chamber profile
Slat profile	40/60/80/100 × 15 mm solid wood slat, rectangular
Slat carrier profile	20 × 5 mm extruded aluminium profile
Horizontal cross-panel	20 × 10 mm extruded aluminium square tube
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Pull catch Turning lock Pre-assembly Gap and joint cover Protection against flashover Rail end stop Arrester for shutter with bracket Motorisation MoveTronic