



# NATURE-SL12-S



Surface	Solid wood slat, planed Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Type of wood	Siberian larch
Colours	Colours available on request and in accordance with order placement once a sample has been produced and approved
Pretreatment	Untreated; Glazed slats on request
Notes	A support profile is required for heights greater than 1501 mm The considerable weight must be taken into consideration when preparing assembly

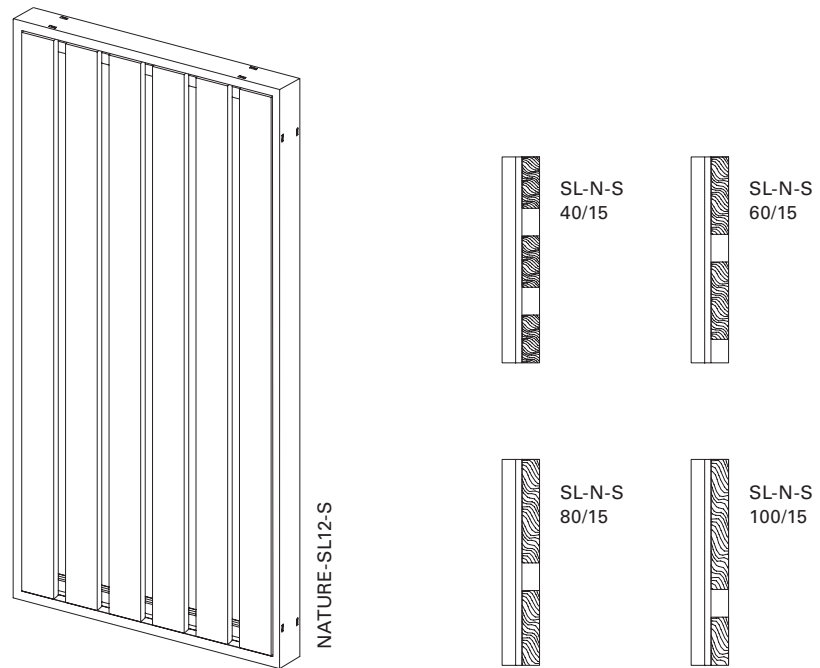

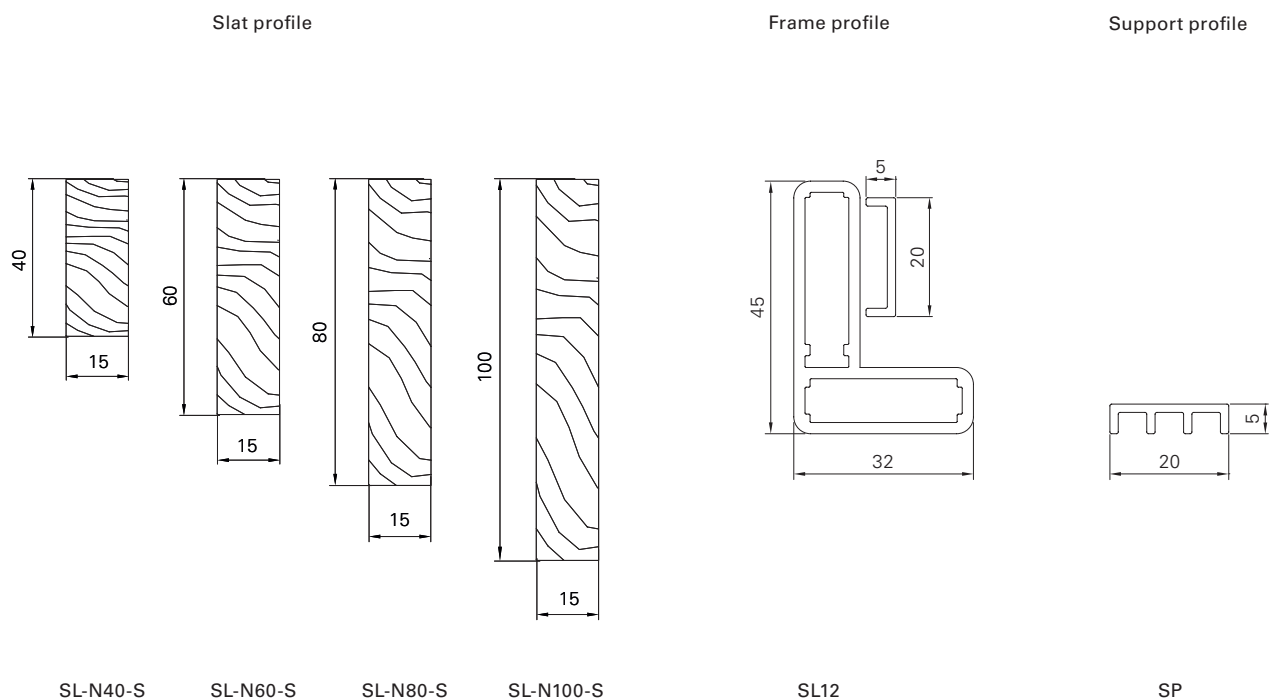

<b>Min./Max. dimensions</b>	Width: 550 to 1600 mm Height: 800 to 3000 mm
<b>Min./Max. infeed</b>	Approx. 50,0–60,0 mm (SL-N40-S); Approx. 70,0–80,0 mm (SL-N60-S); Approx. 90,0–100,0 mm (SL-N80-S); Approx. 110,0–120,0 mm (SL-N100-S)
<b>Weight</b>	Approx. 15 kg/m <sup>2</sup>
<b>Frame profile</b>	45 × 32 mm extruded aluminium hollow chamber profile
<b>Slat profile</b>	40/60/80/100 × 15 mm solid wood slat, rectangular
<b>Slat carrier profile</b>	20 × 5 mm extruded aluminium profile
<b>Support profile</b>	20 × 5 mm extruded aluminium hollow chamber profile
<b>Corner connections</b>	Glued-in aluminium bracket with visible notch in the outer frame
<b>Options</b>	Electric drive