
NATURE-SL12

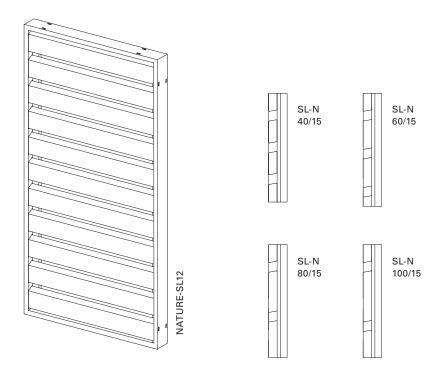

Surface Solid wood slat, planed

Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly

Type of wood Siberian larch

Colours available on request Colours

and in accordance with order placement once a sample has been produced and approved

Pretreatment Untreated;

Glazed slats on request

Notes The considerable weight must be taken into consideration when preparing assembly

















SL-N40 SL-N60 SL-N80 SL-N100 SL12

Min./Max. dimensions Width: 225 to 600 mm

Height: 800 to 2500 mm

Min./Max. infeed Approx. 70,0-80,0 mm

Weight Approx. 15 kg/m²

Frame profile 45×32 mm extruded aluminium hollow chamber profile

 $\begin{array}{ll} \mbox{Slat profile} & 40/60/80/100 \times 15 \mbox{ mm solid wood slat} \\ \mbox{Slat carrier profile} & 20 \times 5 \mbox{ mm extruded aluminium profile} \\ \end{array}$

Corner connections Glued-in aluminium bracket with visible notch in the outer frame

Options Pull catch | Turning lock | Pre-assembly | Gap and joint cover |

Protection against flashover \mid Rail end stop \mid Arrester for shutter with bracket \mid

Motorisation MoveTronic