





NATURE-SL12

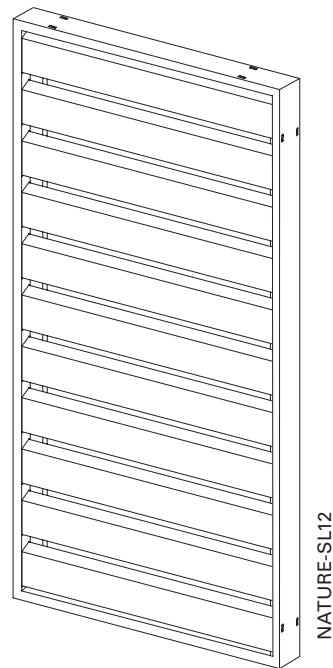

SL-N
40/15



SL-N
60/15



SL-N
80/15



SL-N
100/15


Surface	Solid wood slat, planed Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Type of wood	Siberian larch
Colours	Colours available on request and in accordance with order placement once a sample has been produced and approved
Pretreatment	Untreated; Glazed slats on request
Notes	A support profile is required for widths greater than 801 mm The considerable weight must be taken into consideration when preparing assembly



Slat profile

Frame profile

Support profile

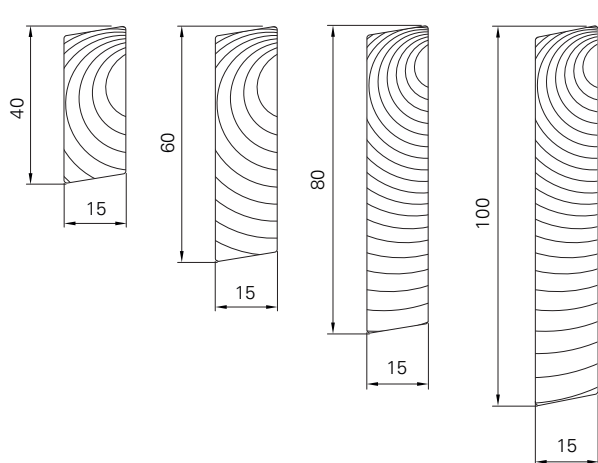


SL-N40


SL-N60

SL-N80

SL-N100



SL12



SP

Min./Max. dimensions	Width: 550 to 1600 mm Height: 800 to 3000 mm
Min./Max. infeed	Approx. 50,0–60,0 mm (SL-N40), Approx. 70,0–80,0 mm (SL-N60), Approx. 90,0–100,0 mm (SL-N80), Approx. 110,0–120,0 mm (SL-N100)
Weight	Approx. 15 kg/m ²
Frame profile	45 × 32 mm extruded aluminium hollow chamber profile
Slat profile	40/60/80/100 × 15 mm solid wood slat
Slat carrier profile	20 × 5 mm extruded aluminium profile
Support profile	20 × 5 mm extruded aluminium hollow chamber profile
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Electric drive