



# PARIS-R48



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Electric drive and finish are not possible in combination with special shapes Drain holes at bottom of frame Slats are exchangeable

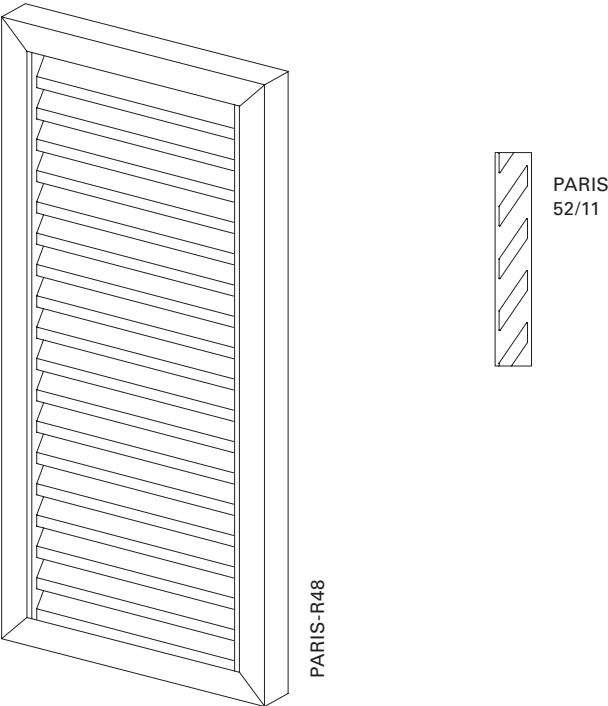


Slat profile



PARIS

Frame profile



R48

<b>Min./Max. dimensions</b>	Width: 280 to 800 mm Height: 800 to 2500 mm
<b>Min./max. infeed</b>	40,0–50,5 mm
<b>Inclination angle</b>	35°
<b>Weight</b>	Approx. 6 kg/m <sup>2</sup>
<b>Frame profile</b>	48 × 32 mm extruded aluminium hollow chamber profile
<b>Slat profile</b>	52 × 11 mm extruded aluminium hollow chamber profile
<b>Slat carrier profile</b>	32 × 11 mm extruded aluminium
<b>Stop bead</b>	Supplied loose, black or white rubber (depending on sash colour)
<b>Corner connections</b>	Aluminium bracket, glued-in and additionally secured by plastic pins
<b>Options</b>	Notching   Electric drive   Rabbit bead   Vertical cross-panel   Half-round arch (mounted)   Horizontal cross-panel   Inside opener crank   Frames   Basic frame   Segmental arch, hollow (mounted)   Pre-installation   Segmental arch, solid (mounted)   Catch   Special shapes (arched frame profile)