



PARIS-SR



| | |
|---------------------|--|
| Surface | Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly |
| Colours | RAL Classic, RAL Design, NCS, VSR |
| Finishes | Wood, stone, rust |
| Pretreatment | Ocean Line Plus possible |
| Notes | Distribution of horizontal cross-panel: 1/3 top, 2/3 bottom; division by dimensions specification also possible (depending on distribution of slats) Inserts are exchangeable Drain holes at bottom of frame Electric drive and finish are not possible in combination with special shapes When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323) Floor locking in combination with special shapes can only be installed to a limited extent |

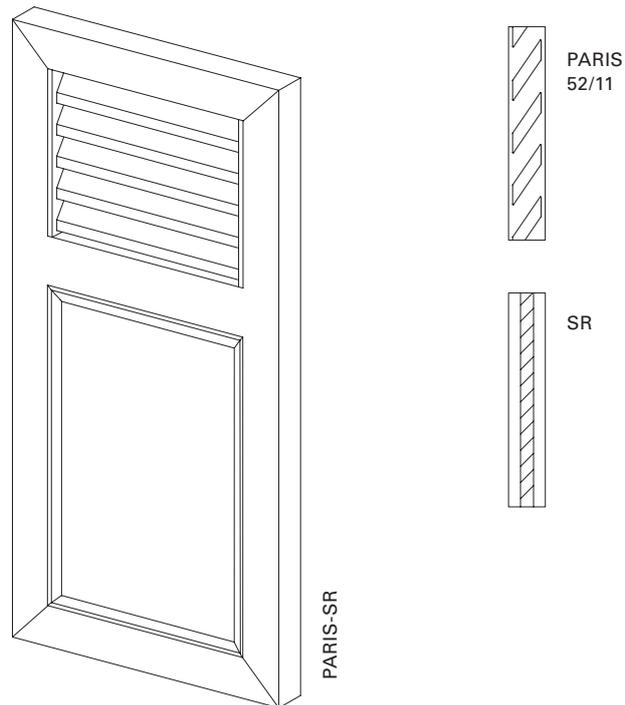

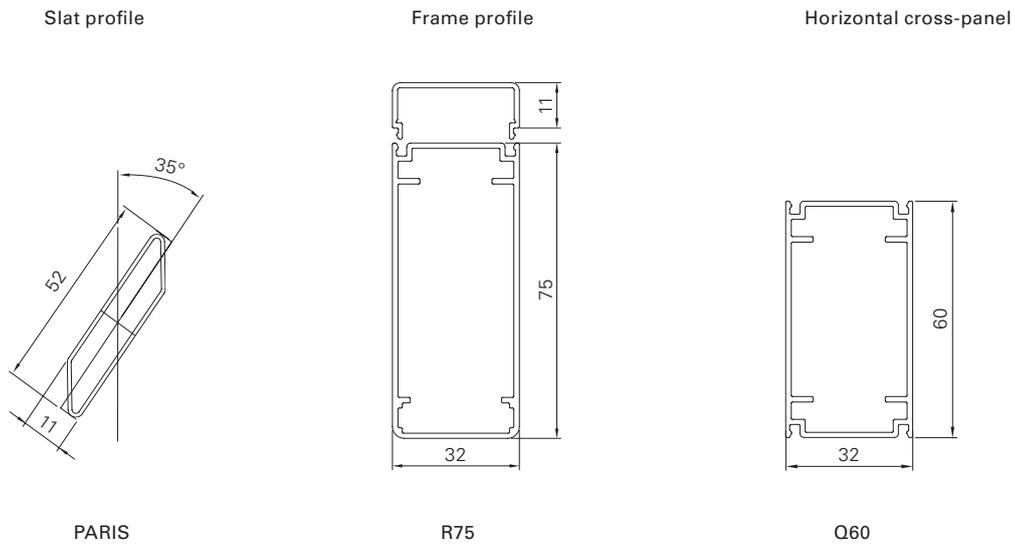

| | |
|---------------------------------------|---|
| Min./Max. dimensions | Width: 280 to 800 mm Height: 800 to 2500 mm |
| Min./max. infeed | 40,0–50,5 mm |
| Inclination angle | 35° |
| Weight | Approx. 7 kg/m ² |
| Frame profile | 75 × 32 mm extruded aluminium hollow chamber profile |
| Slat profile | 52 × 11 mm extruded aluminium hollow chamber profile |
| Slat carrier profile | 32 × 11 mm extruded aluminium profile |
| Horizontal cross-panel profile | 60 × 32 mm extruded aluminium hollow chamber profile |
| Centre | Polystyrene rigid foam board with double-sided aluminium sheeting |
| Stop bead | Supplied loose, black or white rubber (depending on sash colour) |

Corner connections Aluminium bracket, glued-in and additionally secured by plastic pins

Options Notching | Add-on lock | Opener | Floor locking | Electric drive | Easyflex | Rabbet bead | Vertical cross-panel | Half-round arch (mounted) | Horizontal cross-panel | Inside opener crank | Frames | Basic frame | Rod lock | Segmental arch, hollow (mounted) | Pre-installation | Segmental arch, solid (mounted) | Catch | Special shapes (arched frame profile) |