



PL-LO-N



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	If necessary, the sash width may be less than the minimum Standard grid perforation is 10/10 mm at a distance of 50 mm Other perforations or motifs on request Drain holes at bottom of frame

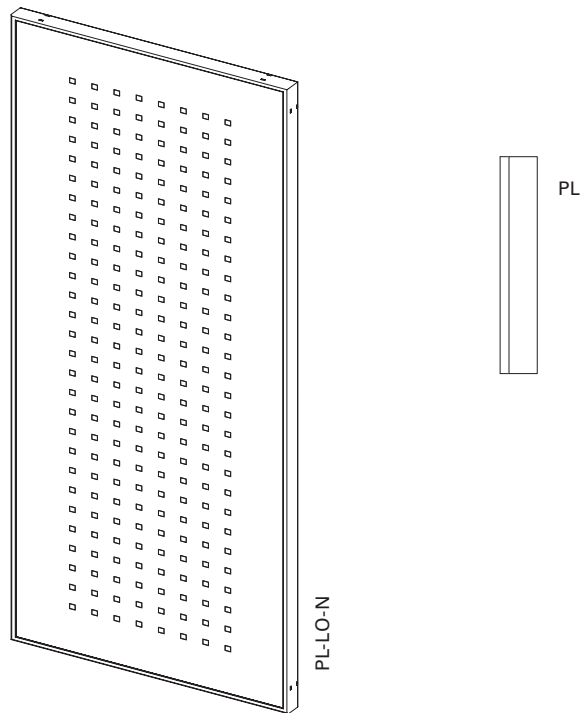


Centre



PL-LO-N

Frame profile

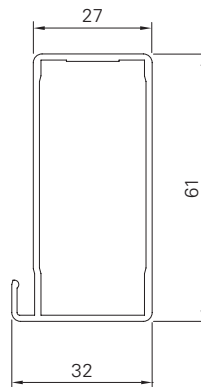

AR61-B1

Min./max. dimensions	Width: 550 to 1500 mm, Height: 800 to 3000 mm
Weight	Approx. 9 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Centre	One-sided riveted 2 mm aluminium plate with grid perforation
Corner connection	Glued-in aluminium bracket with visible notch in the outer frame
Options	Electric drive Additional aluminium plate on inside of sash