



PL-LO-R48




Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	<p>If necessary, the sash width may be less than the minimum From a sash width of 1500 mm, two aluminium plates are slotted into place. For technical reasons this makes a horizontal cross-panel profile necessary.</p> <p>Standard grid perforation is 10/10 mm at a distance of 50 mm Other perforations or motifs on request</p> <p>Drain holes at bottom of frame</p>

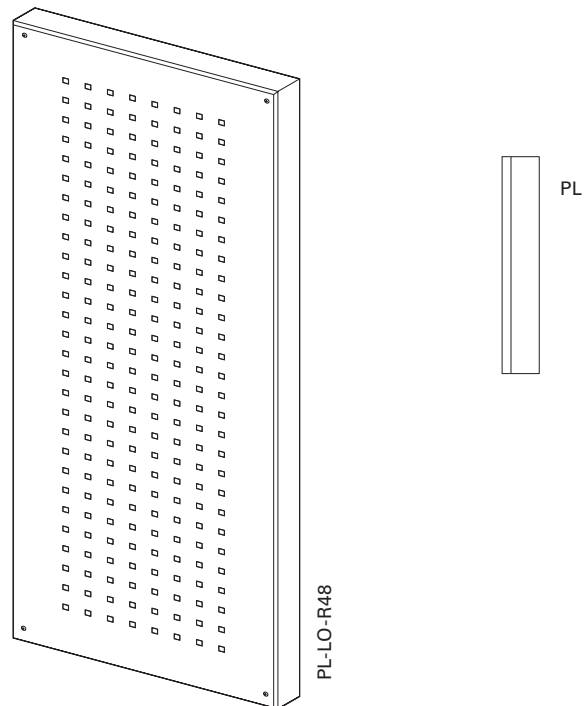


Centre



Frame profile



R48

Horizontal cross-panel
profile


Q60

Min./max. dimensions	Width: 550 to 2200 mm, Height: 800 to 3000 mm
Weight	Approx. 9 kg/m ²
Frame profile	48 × 32 mm extruded aluminium hollow chamber profile
Centre	One-sided riveted 2 mm aluminium plate with grid perforation
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile (optional)
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Electric drive Horizontal cross-panel Vertical cross-panel Additional aluminium plate on inside of sash