



# PL-LO



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	<p>If necessary, the sash width may be less than the minimum</p> <p>From a sash width of 1500 mm, two aluminium plates are slotted into place. For technical reasons this makes a horizontal cross-panel profile necessary.</p> <p>Standard grid perforation is 10/10 mm at a distance of 50 mm</p> <p>Other perforations or motifs on request</p> <p>Drain holes at bottom of frame</p>

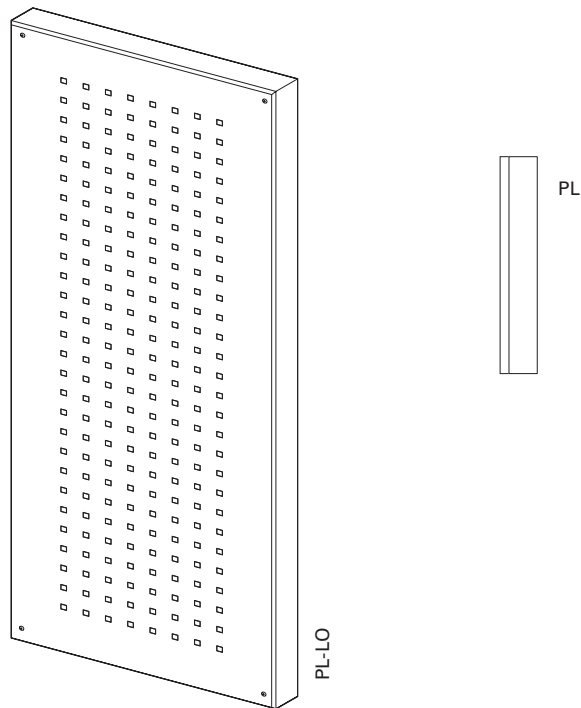


Centre




PL-LO

Frame profile



R75

Horizontal cross-panel profile



Q60

Min./max. dimensions	Width: 550 to 2200 mm, Height: 800 to 3000 mm
Weight	Approx. 9 kg/m <sup>2</sup>
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Centre	One-sided riveted 2 mm aluminium plate with grid perforation
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile (optional)
Corner connection	Glued-in aluminium bracket with visible notch in the outer frame
Options	Electric drive   Horizontal cross-panel   Vertical cross-panel