



PL-U



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	From a sash width of 1500 mm, two aluminium plates are slotted into place. For technical reasons this makes a horizontal cross-panel profile necessary. Drain holes at bottom of frame

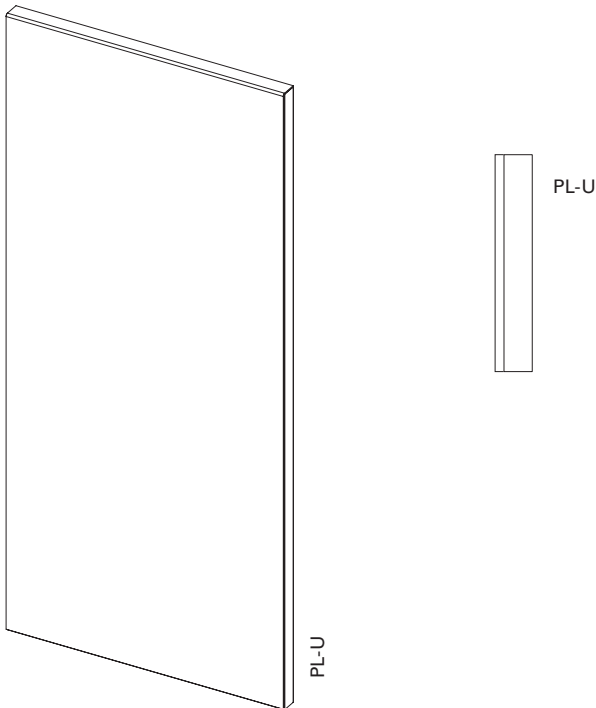

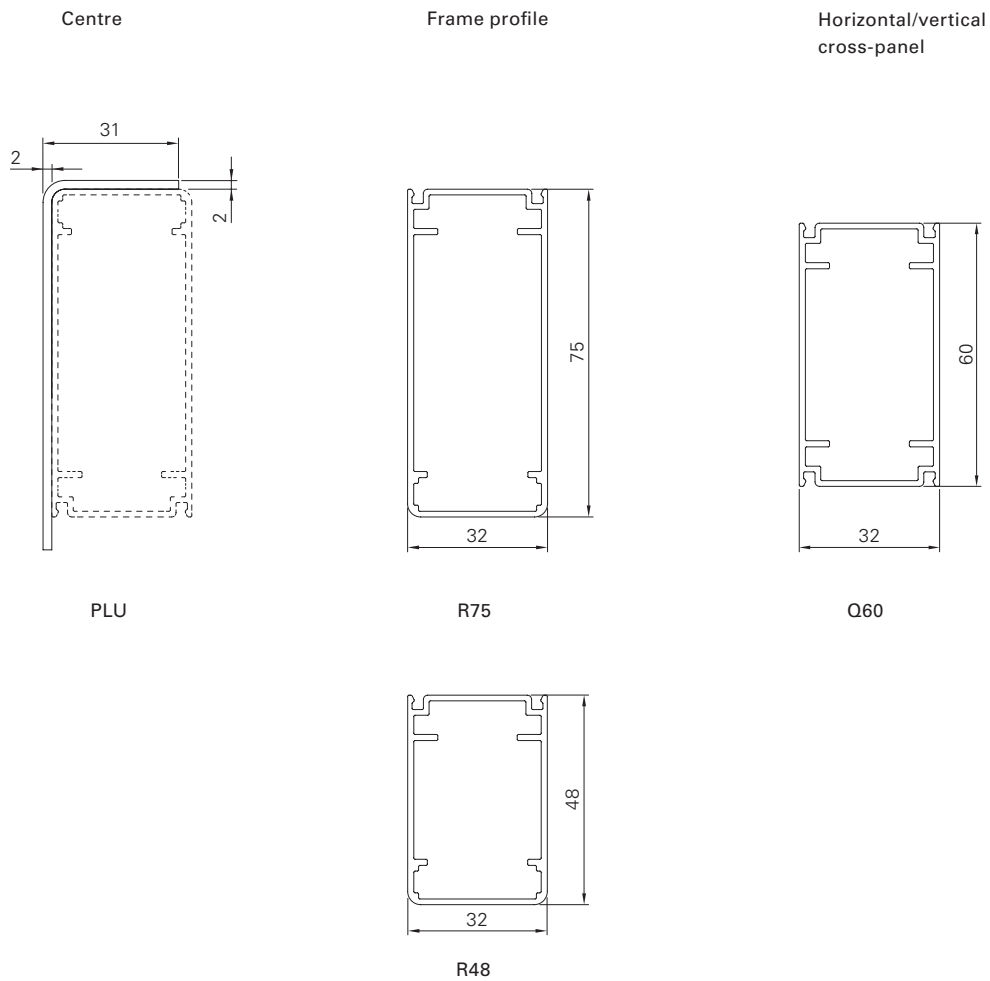

Min./max. dimensions	Width: 550 to 2200 mm, Height: 800 to 3000 mm
Weight	Approx. 9 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Option R48	48 × 32 mm extruded aluminium hollow chamber profile
Centre	31 × 2 mm edged aluminium plate, glued and fixed from above
Horizontal/vertical cross-panel	60 × 32 mm extruded aluminium hollow chamber profile (optional)
Corner connection	Glued-in aluminium bracket with visible notch in the outer frame
Options	Electric drive Horizontal cross-panel Vertical cross-panel Additional aluminium plate on inside of sash