

PLANO-MAX70



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly		
Colours	RAL Classic, RAL Design, NCS, VSR		
Finishes	Wood, stone, rust		
Pretreatment	Ocean Line Plus possible		
Notes	From a sash width of 3001 mm, two aluminium plates are slotted into place. For technical reasons this makes a horizontal cross-panel profile necessary		

Drain holes at bottom of frame

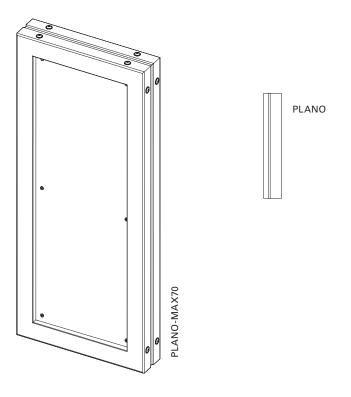

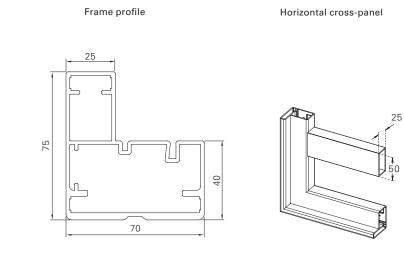

MAX70

QMAX70

Min./Max. dimensions	Width: 550 to 1500 mm
	Height: 800 to 5500 mm
Weight	Approx. 14 kg/m ²
Frame profile	75 × 70 mm extruded aluminium hollow chamber profile,
	visible frame width 25 mm
Centre	One-sided riveted in frame, 2 mm aluminium plate
Horizontal cross-panel profile	50×25 mm extruded aluminium hollow chamber profile (optional)
Corner connection	Aluminium bracket, glued-in and additionally bolted
Ontiona	Electric drive I Sliding electron fluch helt I Herizontal erece papel
Options	Electric drive Sliding shutter flush bolt Horizontal cross-panel