



Security frame



Security frame	4-sided frame A incl. a window seat D completely welded, safety hinges B pre-mounted on frame and sashes, sashes and shutter stop preinstalled, milling for rod lock locking system
Surface	Fine structure matt (standard), silk gloss, matt
Colours	RAL Classic, RAL Design, NCS, VSR
System drawing	2
Notes	At a height of over 1400 mm, 3 safety hinges are used on each side. If the original cylinder needs replacing, another cylinder of the type BKS 8900 SKG**27 N (half cylinder with drilling protection) must be used.

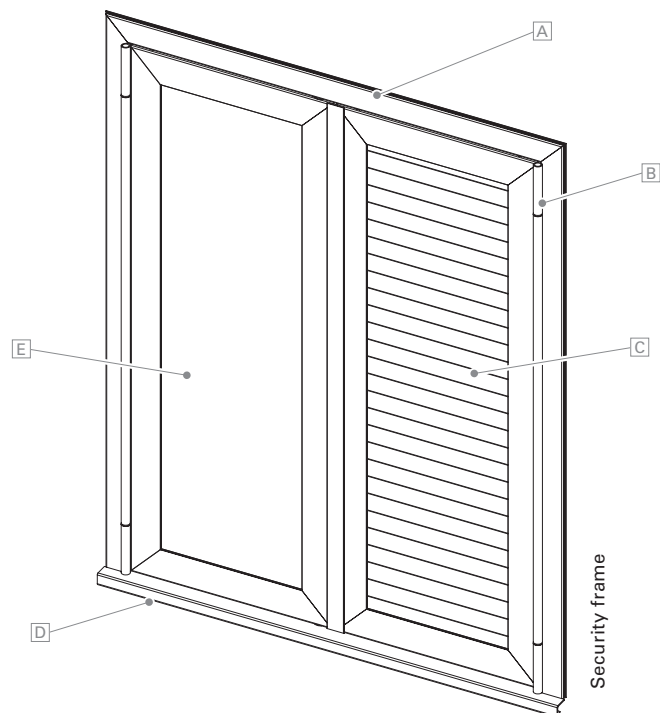


Frame profile
Security frame

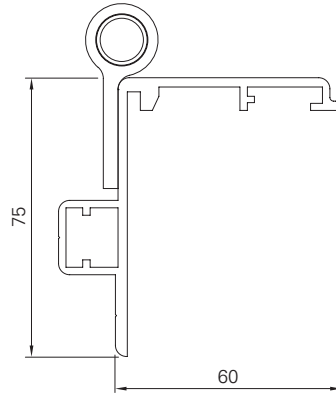



Z75

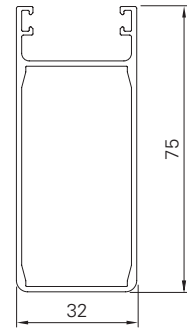Frame profile
Sash



TZR75

Clear dimensions Min./max.	Width: 743 mm to 1643 mm Height: 837 mm to 2537 mm
Frame profile	Frame: 75 × 60 mm extruded Al hollow chamber profile; Sash: 75 × 32 mm extruded Al hollow chamber profile
Model selection	TIZO-S  , TSW-S  , TIZO-S-ROM
Centre	Polystyrene rigid foam board with double-sided aluminium profile, 135 mm
Stop bead	Preinstalled
Corner connections	Welded
Locking system	Bar lock at top and bottom, cannot be replaced
Window sill frame shapes	Typ 1, 2, 5, 6
Options	Horizontal cross-panel Shutter catch systems