



# SL



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame Slats are exchangeable

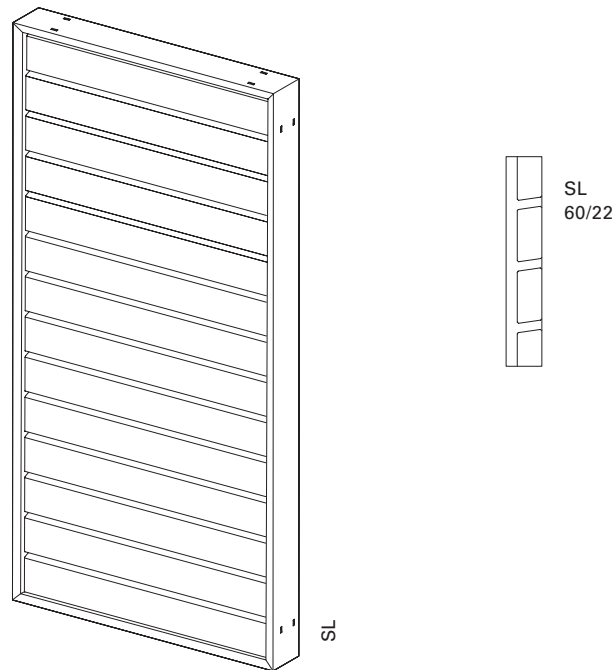


Slat profile



SL

Frame profile



SL

Min./Max. dimensions	Width: 225 to 600 mm Height: 800 to 3000 mm
Min./max. infeed	70,0–80,0 mm
Inclination angle	90°
Weight	Approx. 9 kg/m²
Frame profile	45 × 32 mm extruded aluminium hollow chamber profile
Slat profile	60 × 22 mm extruded aluminium hollow chamber profile
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Pull catch   Turning lock   Pre-assembly   Gap and joint cover   Protection against flashover   Rail end stop   Arrester for shutter with bracket