



SL-R48

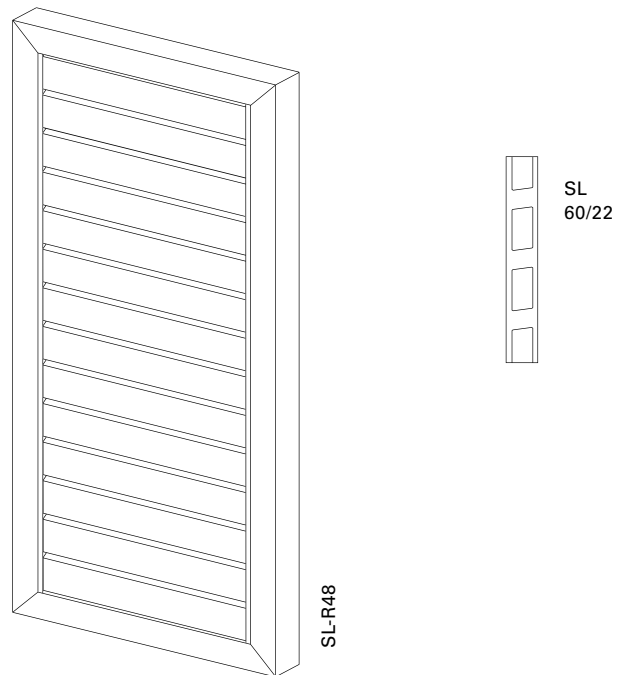

Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame Slats are exchangeable

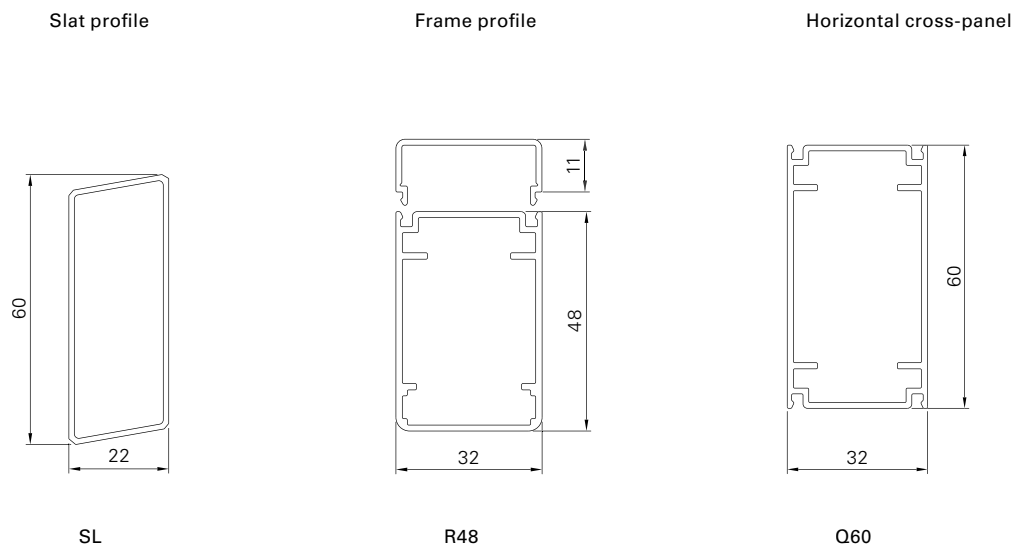

Min./Max. dimensions	Width: 550 to 2200 mm Height: 800 to 2500 mm
Min./max. infeed	Approx. 70,0 – 80,0 mm
Min./max. inclination angle	90°
Weight	Approx. 9 kg/m ²
Frame profile	48 × 32 mm extruded aluminium hollow chamber profile
Slat profile	60 × 22 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Vertical cross-panel Horizontal cross-panel Electric drive