



SL-R75



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame Slats are exchangeable

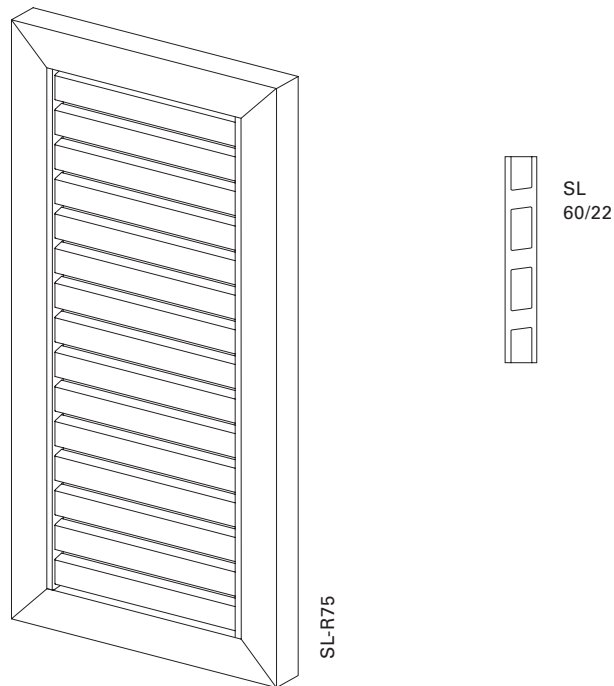

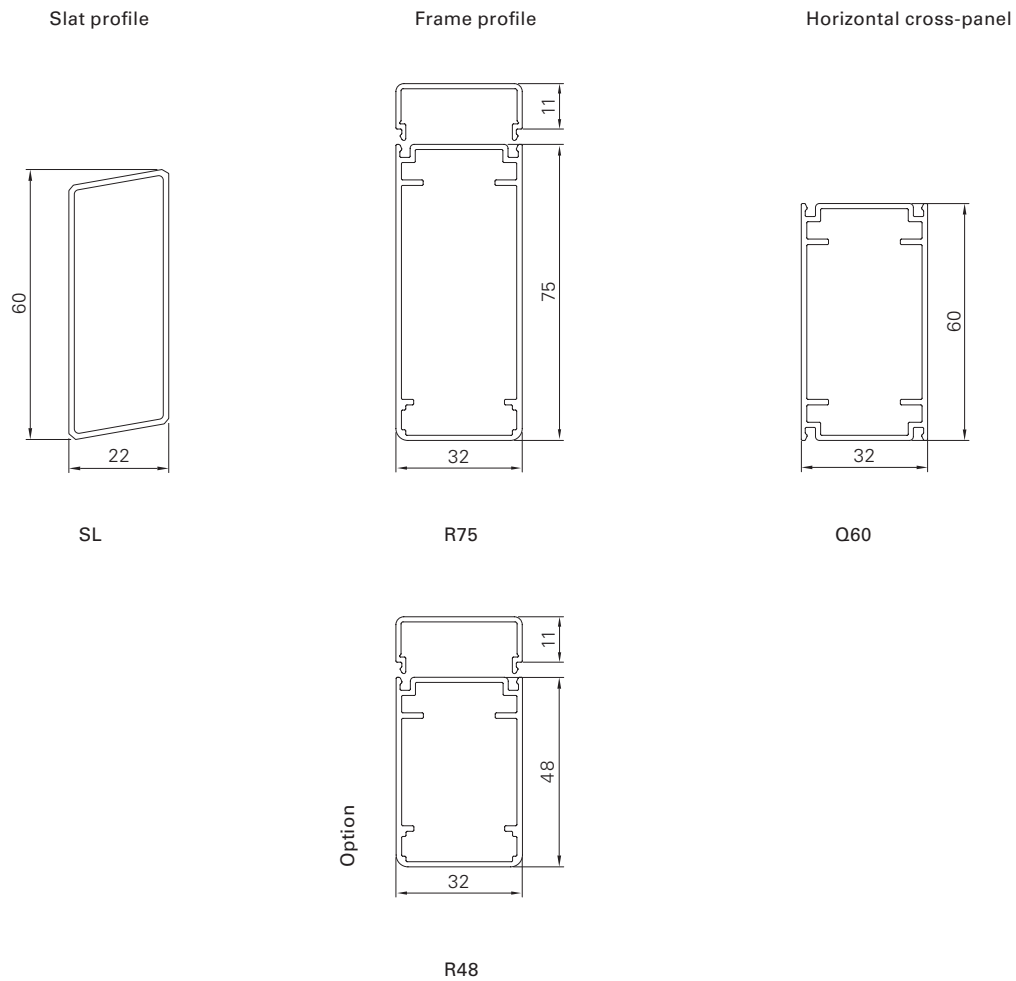

Min./Max. dimensions	Width: 280 to 600 mm Height: 800 to 3000 mm
Min./max. infeed	70,0–80,0 mm
Inclination angle	90°
Weight	Approx. 9 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Option R48	48 × 32 mm extruded aluminium hollow chamber profile
Slat profile	60 × 22 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Pull catch Turning lock Pre-assembly Gap and joint cover Protection against flashover Rail end stop Arrester for shutter with bracket FSL-light Motorisation MoveTronic