



# SL-S




RR20S  
40/60/80/100x20

Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame Slats are exchangeable

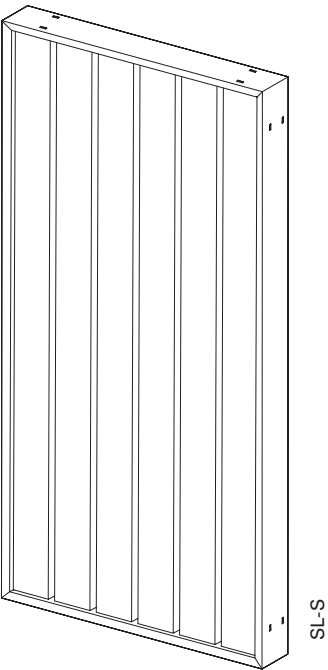


Slat profile



RR20S

Frame profile



SLR

<b>Min./Max. dimensions</b>	Width: 550 to 2100 mm Height: 800 to 3000 mm
<b>Min./max. infeed</b>	Approx. 70,0 – 80,0 mm
<b>Inclination angle</b>	90°
<b>Weight</b>	Approx. 9 kg/m²
<b>Frame profile</b>	45 × 32 mm extruded aluminium hollow chamber profile
<b>Slat profile</b>	40/60/80/100 × 20 mm extruded aluminium hollow chamber profile, rectangular
<b>Corner connections</b>	Glued-in aluminium bracket with visible notch in the outer frame
<b>Options</b>	Electric drive