



SUN-R75

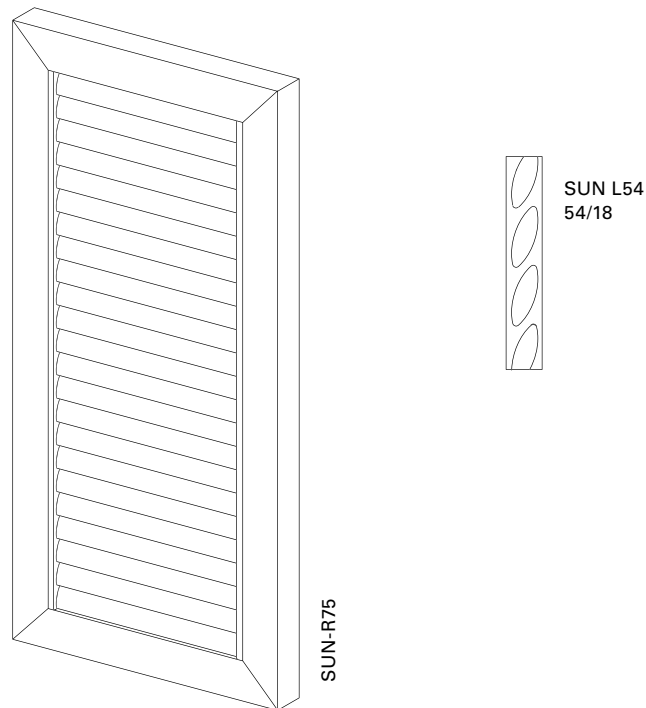


Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Electric drive and finish are not possible in combination with special shapes Drain holes at bottom of frame Slats are exchangeable Floor locking in combination with special shapes can only be installed to a limited extent

Slat profile



SUN L54

Frame profile

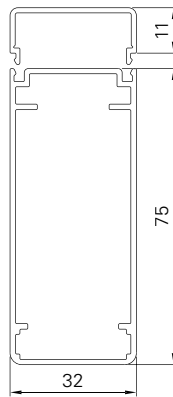

R75

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Min./max. infeed	49,0–51,5 mm
Inclination angle	18°
Weight	Approx. 8 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Slat profile	54 × 18 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Notching Add-on lock Opener Floor locking Electric drive Easyflex Pre-installation Rabbet bead Vertical cross-panel Half-round arch (mounted) Horizontal cross-panel Inside opener crank Basic frame Rod lock Segmental arch, hollow (mounted) Pre-installation Segmental arch, solid (mounted) Catch Frames Special shapes (arched frame profile)