SUN-MAX48 V

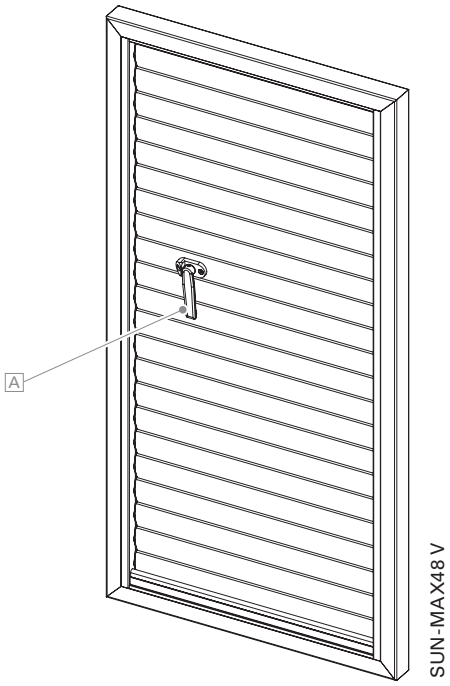

SUN L54
54/18

Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours **Finishes** **Pretreatment**	RAL Classic, RAL Design, NCS, VSR Wood, stone, rust Ocean Line Plus possible
Adjustment lever A	Flexible operating height (as option); Horizontal position: in the middle at sash width <1000 mm, offset to the left/right side depending on the stop diagram at a distance of 170 mm from the outer edge of the frame at sash width ≥1000 mm; Angle of opening adjustable in four different indexed positions
Notes	Drain holes at bottom of frame Slat end caps made of black or white plastic

© 12.2022 EHRET GmbH | Subject to technical modifications and dimensional amendments

Centre



SUN L54

Frame profile



MAX48

Profili di compensazione



VAN48 / VAL48

Min./max. dimensions	Width: 650 to 1500 mm Height: 800 to 3000 mm
Infeed	50,0 mm
Min./max. inclination angle	4–89°
Weight	Approx. 13 kg/m²
Frame profile	48 × 32 mm extruded aluminium hollow chamber profile
Slat profile	54 × 18 mm extruded aluminium hollow chamber profile
Slat carrier profile	48 × 16 mm extruded aluminium profile
Adjustment profiles	45 × 15 mm and 10 × 50 mm extruded aluminium profile (at top and bottom)
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Electric drive | Sliding shutter flush bolt

© 12.2022 EHRET GmbH | Subject to technical modifications and dimensional amendments