



SUN-P70



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Slat spacing can be determined individually. The standard distance (from bottom edge of slat to bottom edge of slat) is approx. 70 mm Drain holes at bottom of frame

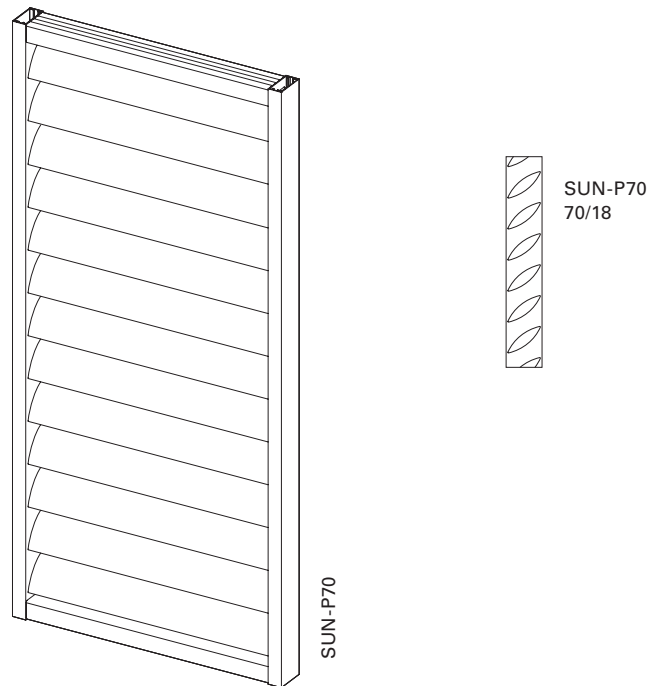

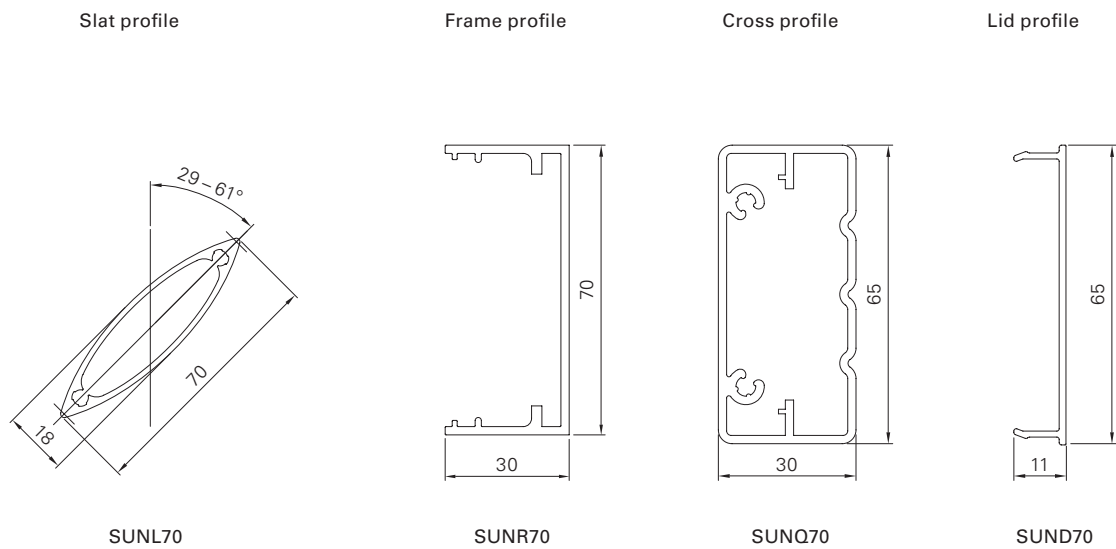

Min./Max. dimensions Width: 550 to 2100 mm
 Height: 800 to 4000 mm

Min./max. infeed Approx. 70 mm
Min./max. inclination angle 29 – 61° (Standard 45°)
Weight Approx. 14 kg/m²

Frame profile 70 × 30 mm extruded aluminium hollow chamber profile
Cross profile 65 × 30 mm extruded aluminium hollow chamber profile
Slat profile 70 × 18 mm extruded aluminium hollow chamber profile
Lid profile 65 × 11 mm extruded aluminium hollow chamber profile

Corner connections Bolted aluminium bracket

Options Electric drive