


# SUN-R480




---

Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	<p>Slat end caps made of black plastic Slats are exchangeable</p> <p>For technical reasons, a horizontal cross-panel is required from a sash height of 1900 mm; upper slat panel is moveable, lower slat panel is fixed</p> <p>Drain holes at bottom of frame</p>

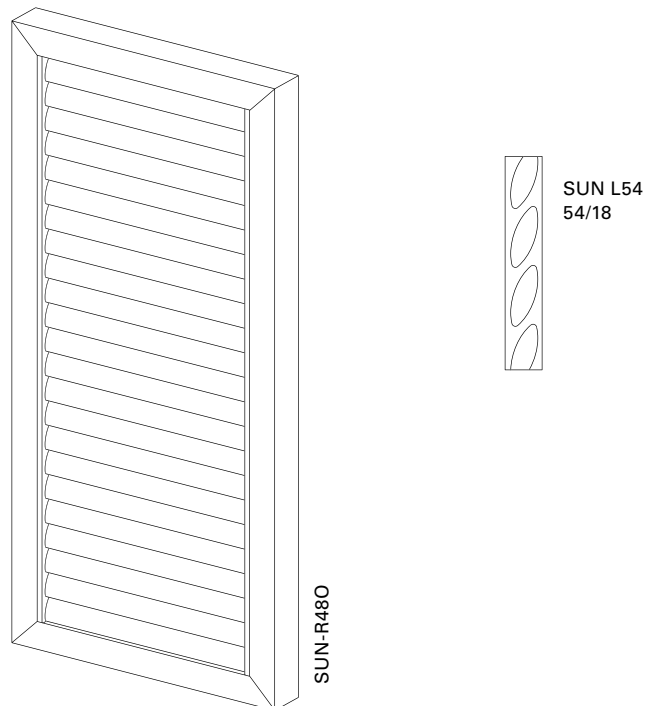


Slat profile




SUN L54

Frame profile



R48

Horizontal cross-panel



Q60

<b>Min./max. dimensions</b>	Width: 280 to 600 mm Height: 800 to 3000 mm
<b>Min./Max. infeed</b>	Approx. 43,5–47,5 mm
<b>Min./max. inclination angle</b>	13–75°
<b>Weight</b>	Approx. 8 kg/m <sup>2</sup>
<b>Frame profile</b>	48 × 32 mm extruded aluminium hollow chamber profile
<b>Slat profile</b>	54 × 18 mm extruded aluminium hollow chamber profile
<b>Slat carrier profile</b>	32 × 11 mm extruded aluminium
<b>Horizontal cross-panel profile</b>	60 × 32 mm extruded aluminium hollow chamber profile
<b>Adjustment</b>	Without adjustment lever, manually adjustable at the slat
<b>Corner connections</b>	Aluminium bracket, glued-in and additionally secured by plastic pins
<b>Options</b>	Electric drive "MoveOn"   Vertical cross-panel   Horizontal cross-panel   Pre-installation   2nd pull catch   Additional adjustable slat panel