



SUN-R75 O



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Slat end caps made of black plastic Slats are exchangeable For technical reasons, a horizontal cross-panel is required from a sash height of 1900 mm; upper slat panel is moveable, lower slat panel is fixed Drain holes at bottom of frame

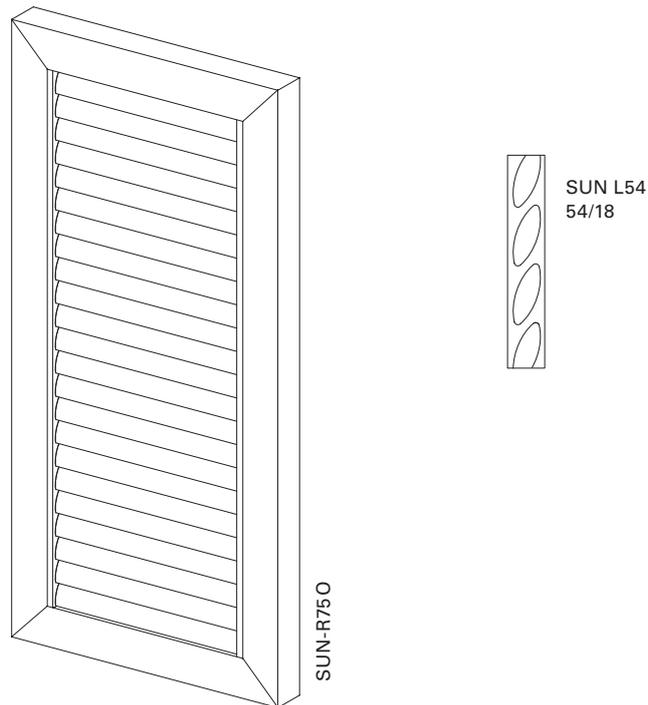

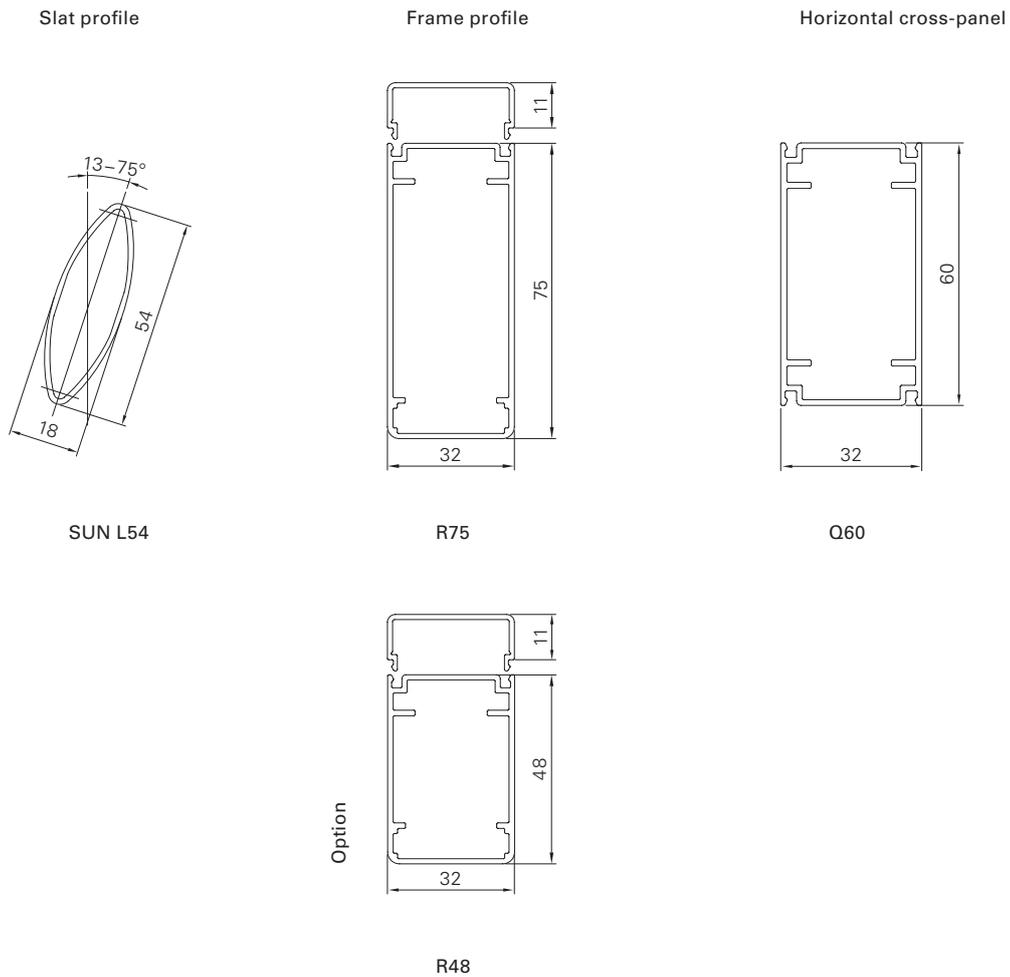

Min./max. dimensions	Width: 280 to 600 mm Height: 800 to 3000 mm
Min./Max. infeed	Approx. 43,5–47,5 mm
Min./max. inclination angle	13–75°
Weight	Approx. 8 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Option R48	48 × 32 mm extruded aluminium hollow chamber profile
Slat profile	54 × 18 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium
Horizontal cross-panel	60 × 32 mm extruded aluminium hollow chamber profile
Adjustment	Without adjustment lever, manually adjustable at the slat
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Additional adjustable slat panel Pull catch Turning lock Pre-assembly Gap and joint cover Protection against flashover Rail end stop Arrester for shutter with bracket