



TIZO



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame Upper slats cut to size

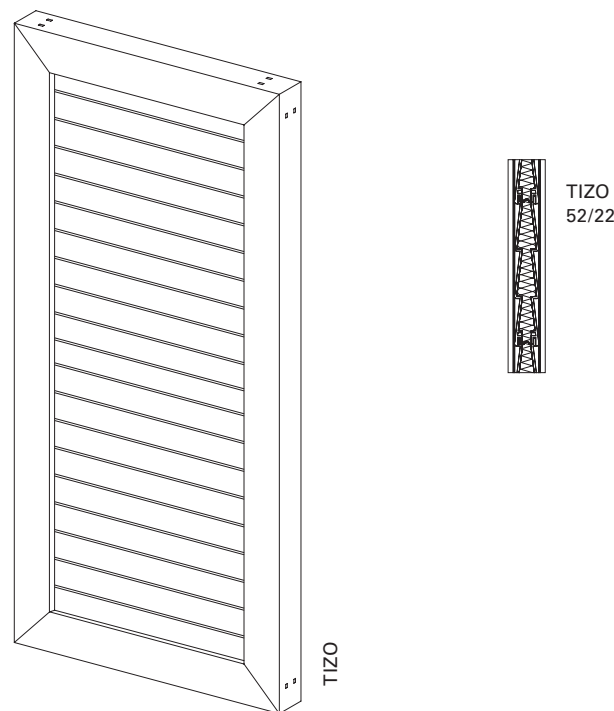


Slat profile

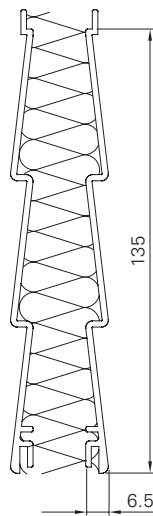


TIZO

Frame profile

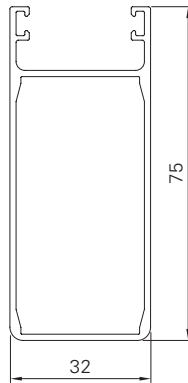

TZR75

Horizontal cross-panel



TZQ60

Min./Max. dimensions	Width: 280 to 600 mm Height: 800 to 2500 mm
Weight	Approx. 13 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Centre	Polystyrene rigid foam board with double-sided aluminium profile, 135 mm
Horizontal cross-panel	60 × 32 mm extruded aluminium hollow chamber profile
Insulation	Resistance to heat passage: $\Delta R = 0.23 \text{ (m}^2 \times \text{K)/W}$
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Pull catch Turning lock Pre-assembly Gap and joint cover Protection against flashover Rail end stop Arrester for shutter with bracket FSL-light Motorisation MoveTronic