



# TIZO



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame Electric drive and finish are not possible in combination with special shapes Upper slats cut to size Rod locks cannot be exchanged Floor locking in combination with special shapes can only be installed to a limited extent

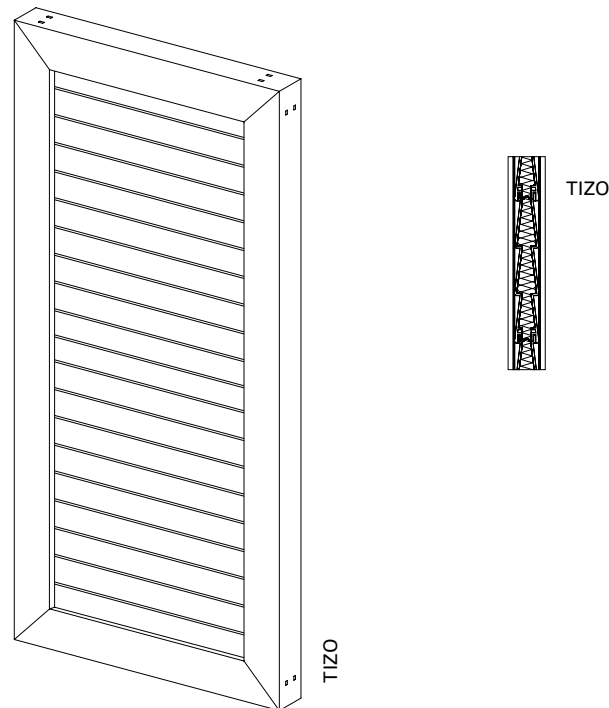


Slat profile

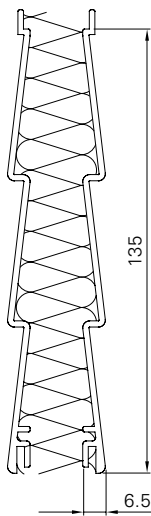

TIZO

Frame profile

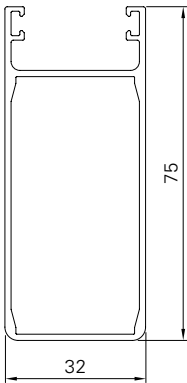

TZR75

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Weight	Approx. 13 kg/m²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Centre	Polystyrene rigid foam board with double-sided aluminium profile, 135 mm
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Insulation	Resistance to heat passage: $\Delta R = 0.23 \text{ (m}^2 \times \text{K)/W}$ (see certificate)
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Notching   Add-on lock   Electric drive   Horizontal cross-panel   Rabbet bead   Frames   Half-round arch (mounted)   Rod lock   Inside opener crank   Pre-installation   Basic frame   Catch   Segmental arch, hollow (mounted)   Segmental arch, solid (mounted)   Special shapes (arched frame profile)