



TIZO-PISA-RS



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR Finishes Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Distribution of horizontal cross-panel: 1/3 top, 1/3 centre, 1/3 bottom; division by dimensions specification also possible (depending on distribution of slats) Electric drive and finish are not possible in combination with special shapes Drain holes at bottom of frame Rod locks cannot be exchanged Floor locking in combination with special shapes can only be installed to a limited extent

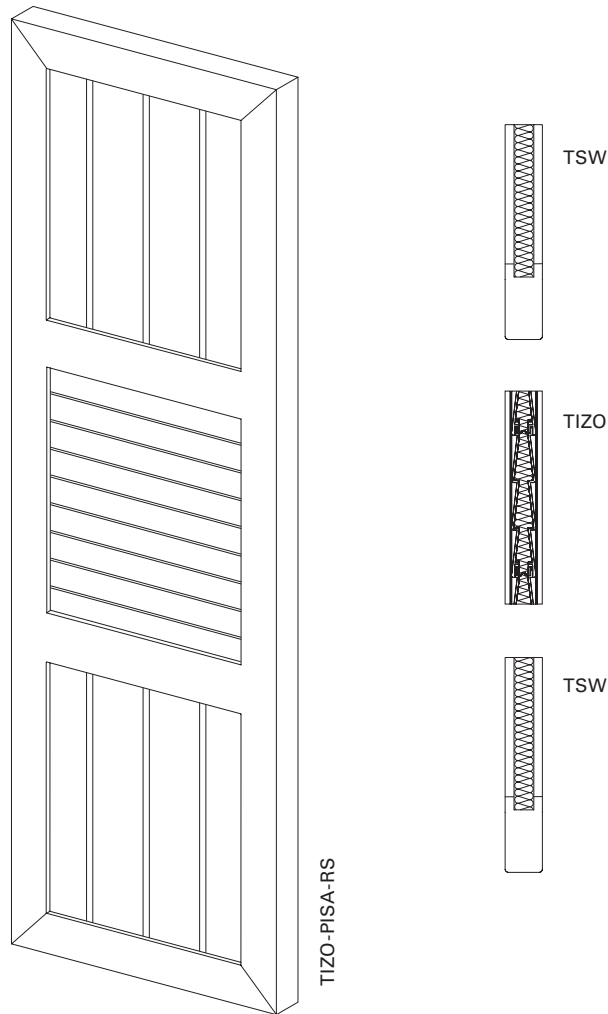

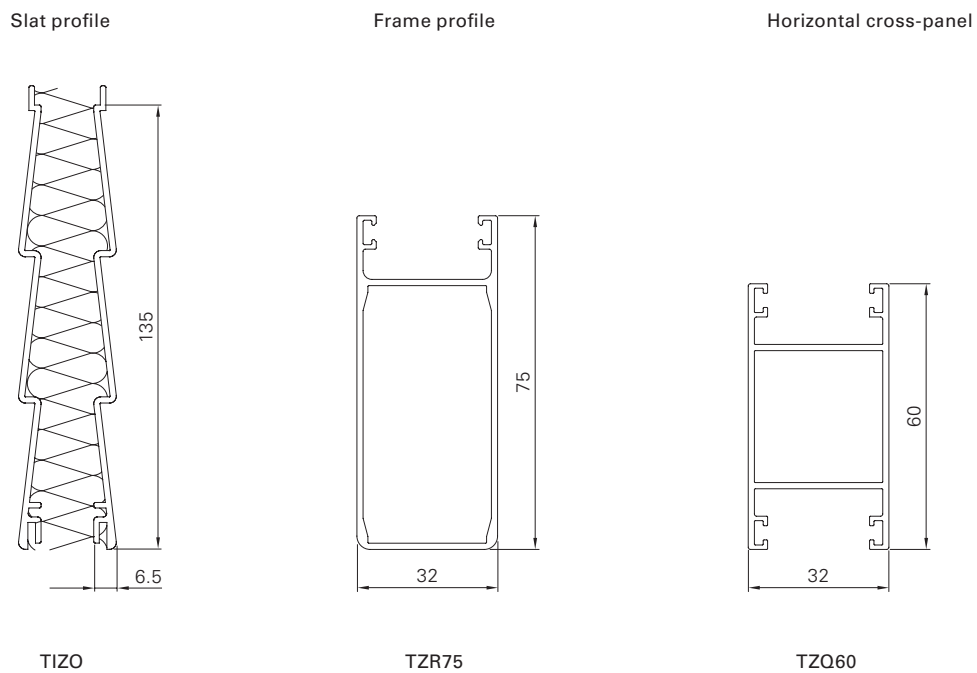

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Weight	Approx. 13 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Centre	Polystyrene rigid foam board with double-sided aluminium profile, 135 mm Polystyrene rigid foam board with double-sided aluminium sheeting plus vertical beading
Horizontal cross-panel	60 × 32 mm extruded aluminium hollow chamber profile
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Notching Add-on lock Electric drive Horizontal cross-panel Rabbet bead Frames Half-round arch (mounted) Rod lock Inside opener crank Pre-installation Basic frame Catch Segmental arch, hollow (mounted) Segmental arch, solid (mounted) Special shapes (arched frame profile)