



# TIZO-PISA-RW



|                     |                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Surface</b>      | Fine structure matt (standard), silk gloss, matt<br>Powder-coated 200 °C before assembly                                                                                                                                                                                                                                                                                                                           |
| <b>Colours</b>      | RAL Classic, RAL Design, NCS, VSR<br>Finishes Wood, stone, rust                                                                                                                                                                                                                                                                                                                                                    |
| <b>Pretreatment</b> | Ocean Line Plus possible                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Notes</b>        | Distribution of horizontal cross-panel: 1/3 top, 1/3 centre, 1/3 bottom; division by dimensions specification also possible (depending on distribution of slats)<br>Electric drive and finish are not possible in combination with special shapes<br>Drain holes at bottom of frame<br>Rod locks cannot be exchanged<br>Floor locking in combination with special shapes can only be installed to a limited extent |

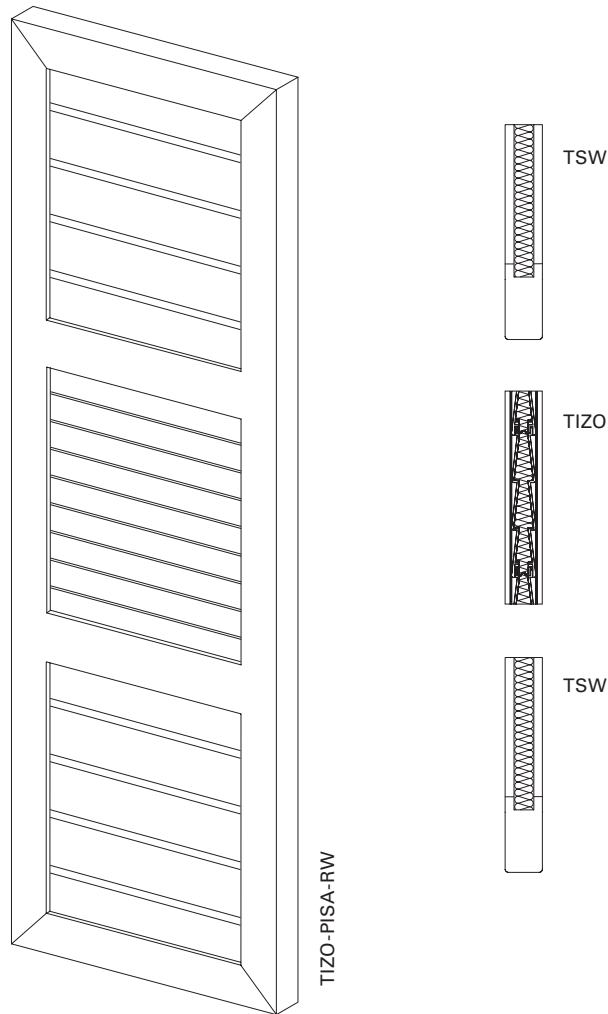

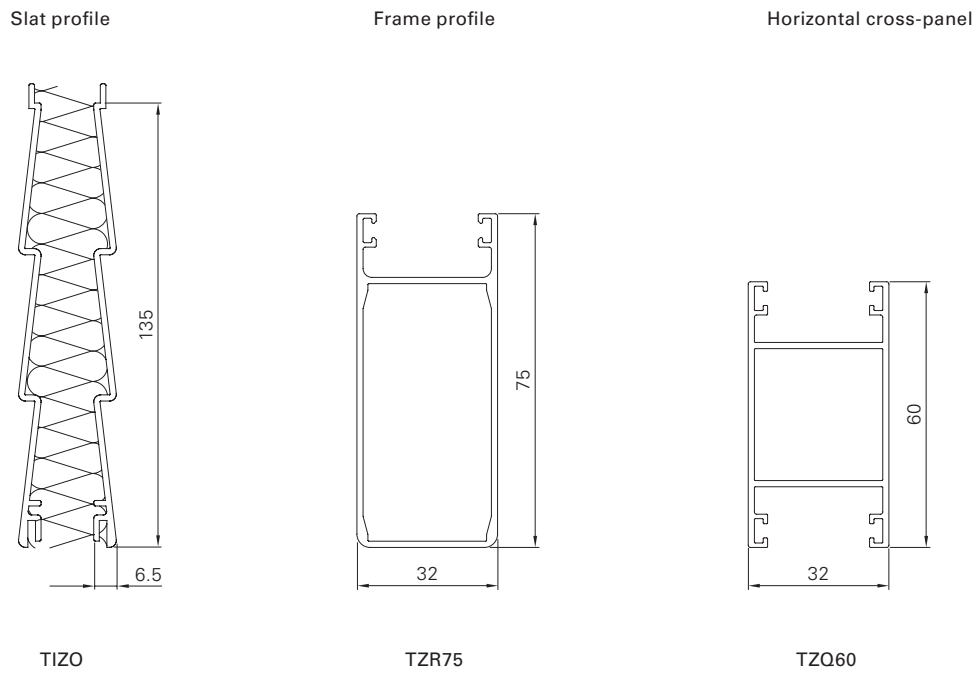

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Min./Max. dimensions</b>   | Width: 280 to 800 mm<br>Height: 800 to 2500 mm                                                                                                                                                                                                                                                                   |
| <b>Weight</b>                 | Approx. 13 kg/m <sup>2</sup>                                                                                                                                                                                                                                                                                     |
| <b>Frame profile</b>          | 75 × 32 mm extruded aluminium hollow chamber profile                                                                                                                                                                                                                                                             |
| <b>Centre</b>                 | Polystyrene rigid foam board with double-sided aluminium profile, 135 mm                                                                                                                                                                                                                                         |
| <b>Horizontal cross-panel</b> | Polystyrene rigid foam board with double-sided aluminium sheeting plus horizontal beading<br>60 × 32 mm extruded aluminium hollow chamber profile                                                                                                                                                                |
| <b>Stop bead</b>              | Supplied loose, black or white rubber (depending on sash colour)                                                                                                                                                                                                                                                 |
| <b>Corner connections</b>     | Glued-in aluminium bracket with visible notch in the outer frame                                                                                                                                                                                                                                                 |
| <b>Options</b>                | Notching   Add-on lock   Electric drive   Horizontal cross-panel   Rabbet bead   Frames  <br>Half-round arch (mounted)   Rod lock   Inside opener crank   Pre-installation   Basic frame  <br>Catch   Segmental arch, hollow (mounted)   Segmental arch, solid (mounted)   Special shapes (arched frame profile) |