



TIZO-ROM-RS



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame Electric drive and finish are not possible in combination with special shapes Upper slats cut to size Distribution of horizontal cross-panel: 1/3 top, 2/3 bottom; distribution also possible according to dimension specification Rod locks cannot be exchanged Floor locking in combination with special shapes can only be installed to a limited extent

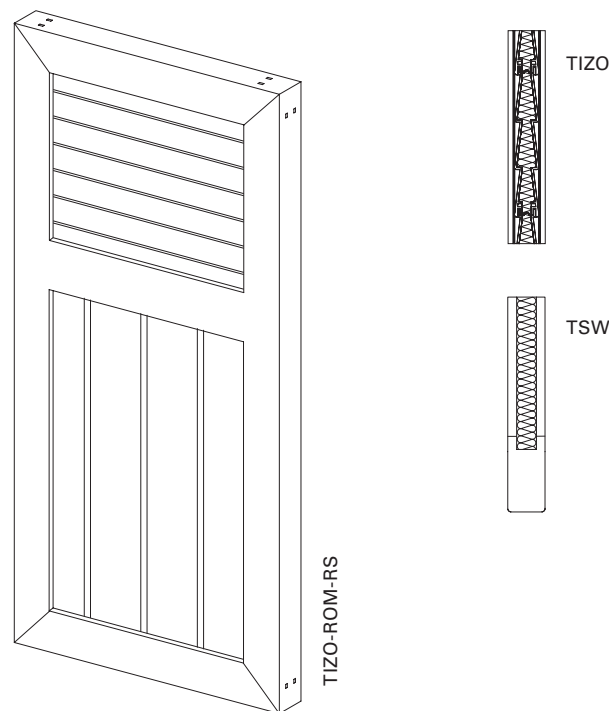


Slat profile

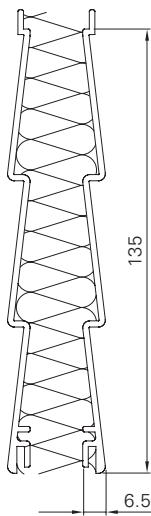


TIZO

Frame profile

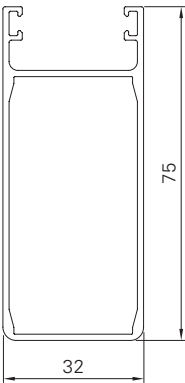

TZR75

Horizontal cross-panel



TZQ60

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Weight	Approx. 13 kg/m²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Centre	Polystyrene rigid foam board with double-sided aluminium profile, 135 mm Polystyrene rigid foam board with double-sided aluminium sheeting plus vertical beading
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Notching Add-on lock Electric drive Horizontal cross-panel Rabbet bead Frames Half-round arch (mounted) Rod lock Inside opener crank Pre-installation Basic frame Catch Segmental arch, hollow (mounted) Segmental arch, solid (mounted) Special shapes (arched frame profile)