

## TSW



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Drain holes at bottom of frame

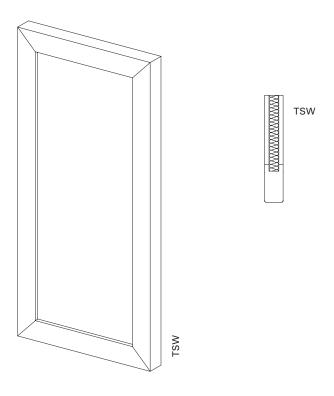



TZR75

Min./Max. dimensions	Width: 280 to 600 mm Height: 800 to 3000 mm
Weight Approx.	13 kg/m²
Frame profile Centre Horizontal cross-panel	75 × 32 mm extruded aluminium hollow chamber profile Polystyrene rigid foam board with double-sided aluminium sheeting 60 × 32 mm extruded aluminium hollow chamber profile
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Pull catch   Turning lock   Pre-assembly   Gap and joint cover   Protection against flashover   Rail end stop   Arrester for shutter with bracket FSL-light   Motorisation MoveTronic