


# TSW




---

<b>Surface</b>	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
<b>Colours</b>	RAL Classic, RAL Design, NCS, VSR Finishes Wood, stone, rust
<b>Pretreatment</b>	Ocean Line Plus possible
<b>Notes</b>	Drain holes at bottom of frame Electric drive and finish are not possible in combination with special shapes Rod locks cannot be exchanged Floor locking in combination with special shapes can only be installed to a limited extent
<b>Model variants</b>	TSW-RS: vertical grooves; TSW-RW: horizontal grooves

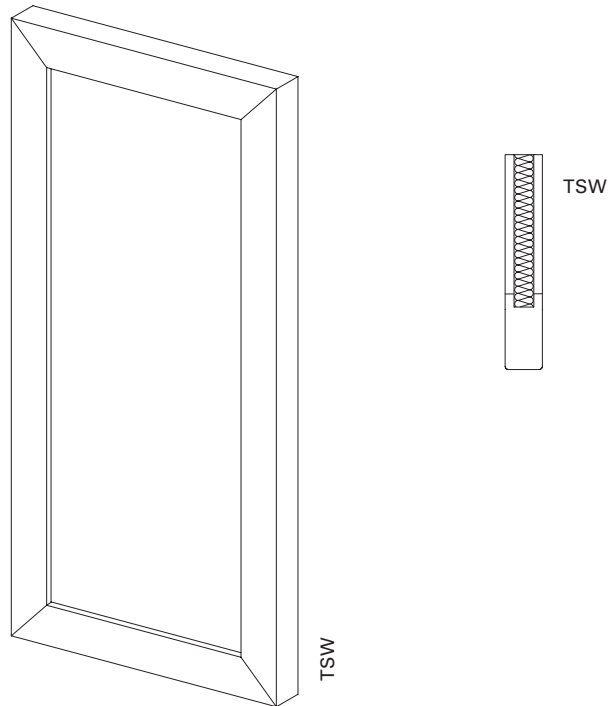

## Frame profile

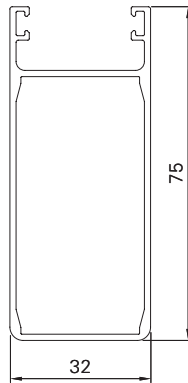

TZR75

<b>Min./Max. dimensions</b>	Width: 280 to 800 mm Height: 800 to 2500 mm
<b>Weight</b>	Approx. 13 kg/m <sup>2</sup>
<b>Frame profile</b>	75 × 32 mm extruded aluminium hollow chamber profile
<b>Centre</b>	Polystyrene rigid foam board with double-sided aluminium sheeting
<b>Stop bead</b>	Supplied loose, black or white rubber (depending on sash colour)
<b>Insulation</b>	Resistance to heat passage: $\Delta R = 0,26 \text{ (m}^2 \times \text{K)/W}$
<b>Corner connections</b>	Glued-in aluminium bracket with visible notch in the outer frame
<b>Options</b>	Notching   Add-on lock   Electric drive   Horizontal cross-panel   Rabbet bead   Frames   Half-round arch (mounted)   Rod lock   Inside opener crank   Pre-installation   Basic frame   Catch   Segmental arch, hollow (mounted)   Segmental arch, solid (mounted)   Special shapes (arched frame profile)