
TSW




Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible

Notes

Drain holes at bottom of frame

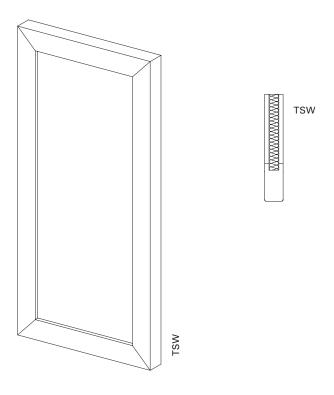



TZR75

TZQ60

Min./Max. dimensions	Width: 550 to 2200 mm Height: 800 to 3000 mm
Weight Approx.	13 kg/m²
Frame profile	75 imes 32 mm extruded aluminium hollow chamber profile
Centre	Polystyrene rigid foam board with double-sided aluminium sheeting
Horizontal cross-panel prof	ile 60×32 mm extruded aluminium hollow chamber profile
Corner connections	Glued-in aluminium bracket with visible notch in the outer frame
Options	Electric drive Vertical cross-panel Horizontal cross-panel