



VARIO-MAX70

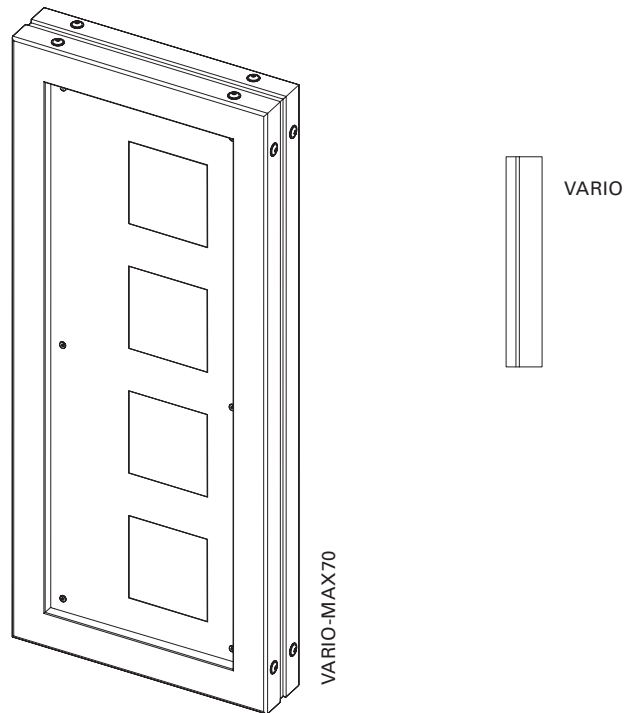


Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	From a sash width of 3001 mm, two aluminium plates are slotted into place. For technical reasons this makes a horizontal cross-panel profile necessary Drain holes at bottom of frame

Frame profile

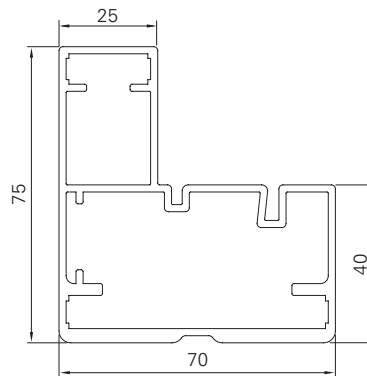

MAX70

Horizontal cross-panel



QMAX70

Min./Max. dimensions	Width: 550 to 1500 mm Height: 800 to 5500 mm
Weight	Approx. 14 kg/m ²
Frame profile	75 × 70 mm extruded aluminium hollow chamber profile, visible frame width 25 mm
Centre	One-sided riveted in frame, 2 mm aluminium plate with grid perforation
Horizontal cross-panel	50 × 25 mm extruded aluminium hollow chamber profile (optional)
Corner connection	Aluminium bracket, glued-in and additionally bolted
Options	Electric drive Sliding shutter flush bolt Horizontal cross-panel