



# VISP (-SE)



|              |  |
|--------------|--|
| Surface      | Fine structure matt (standard), silk gloss, matt<br>Powder-coated 200 °C before assembly   |
| Colours      | RAL Classic, RAL Design, NCS, VSR  |
| Finishes     | Wood, stone, rust  |
| Pretreatment | Ocean Line Plus possible   |
| Notes        | <p>Distribution of horizontal cross-panel: 1/3 top, 1/3 centre, 1/3 bottom; division by dimensions specification also possible (depending on distribution of slats)</p> <p>Slat end caps made of black plastic</p> <p>Inserts are exchangeable</p> <p>Drain holes at bottom of frame</p> <p>For technical reasons a different support frame is installed in combination with special shapes used at the top</p> <p>Structural height of adjustment lever approx. 30 mm – please observe in regard to cranking</p> <p>Electric drive and finish are not possible in combination with special shapes</p> <p>Opener can only be positioned in the centre panel</p> <p>When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323)</p> <p>Floor locking in combination with special shapes can only be installed to a limited extent</p> |

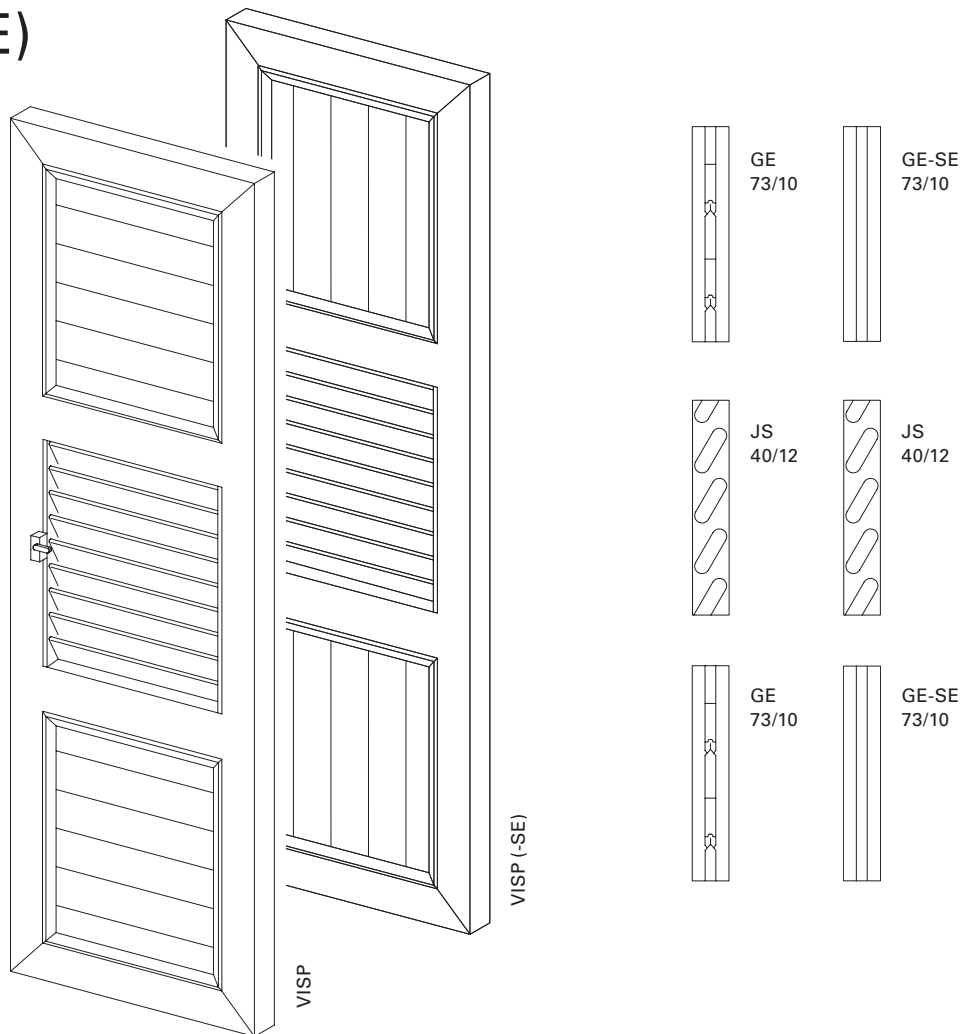

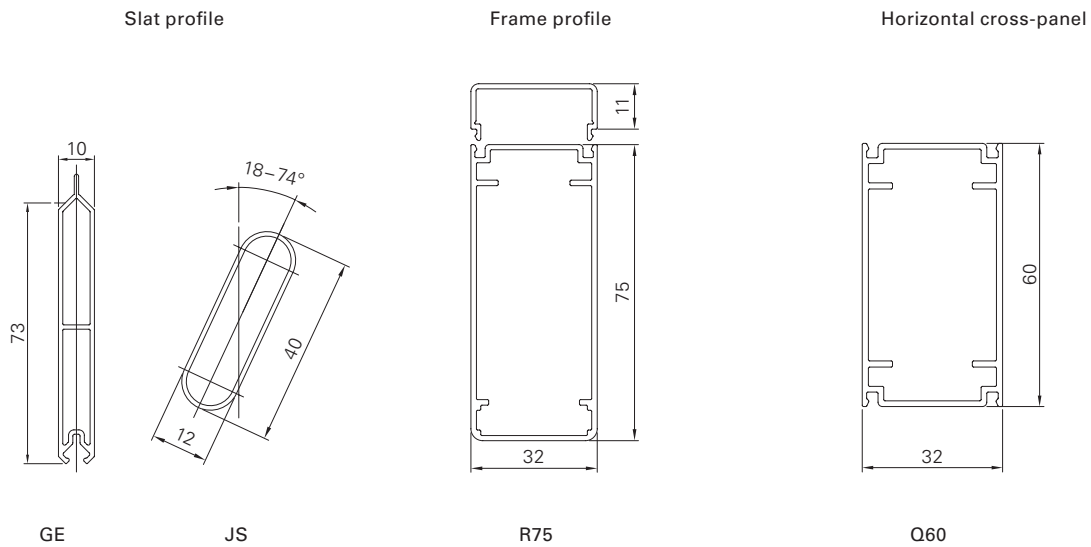

**Min./max. dimensions** Width: 280 to 800 mm  
Height: 800 to 2500 mm

**Min./max. infeed** 34,0–36,0 mm

**Min./max. inclination angle** 18–74°

**Weight** Approx. 8 kg/m<sup>2</sup>

**Frame profile** 75 × 32 mm extruded aluminium hollow chamber profile

**Slat profile** 40 × 12 mm extruded aluminium hollow chamber profile

**Slat carrier profile** 32 × 11 mm extruded aluminium profile

**Horizontal cross-panel profile** 60 × 32 mm extruded aluminium hollow chamber profile

**Centre** 73 × 10 mm extruded aluminium hollow chamber profile

**Adjustment** Adjustable slats via central push rod lock with detent positions

**Stop bead** Supplied loose, black or white rubber (depending on the sash colour)

**Corner connections** Aluminium bracket, glued-in and additionally secured by plastic pins

**Options** Notching | Add-on lock | Opener | Floor locking | Electric drive | Rabbet bead | Vertical cross-panel | Half-round arch (mounted) | Horizontal cross-panel | Inside opener crank | Frames | Basic frame | Rod lock | Segmental arch, hollow (mounted) | Pre-installation | Segmental arch, solid (mounted) | Catch | Special shapes (arched frame profile) | Easyflex