



WIEN



Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200°C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	Distribution of horizontal cross-panel: 1/3 top, 2/3 bottom; division by dimensions specification also possible (depending on distribution of slats) Slat end caps made of black or white plastic Slats project 10 mm laterally from the frame Inserts are exchangeable Drain holes at bottom of frame When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323) Standard spacing between slats 50 mm (varies depending on height of sash)

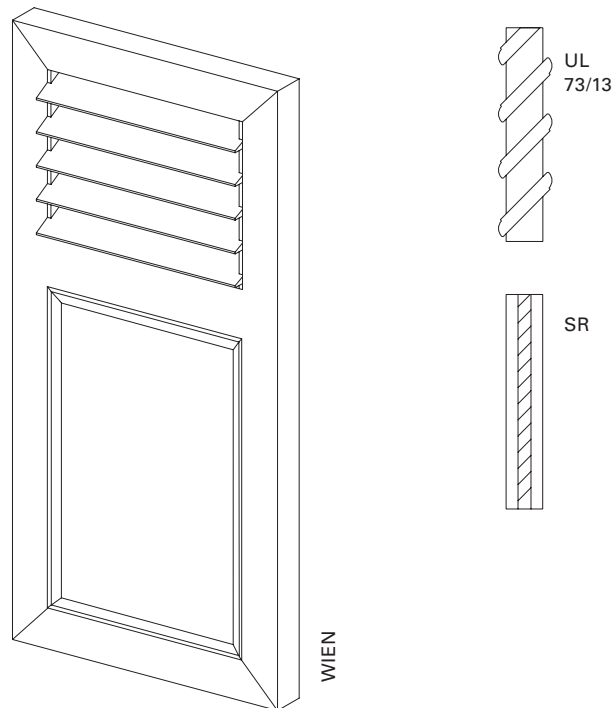

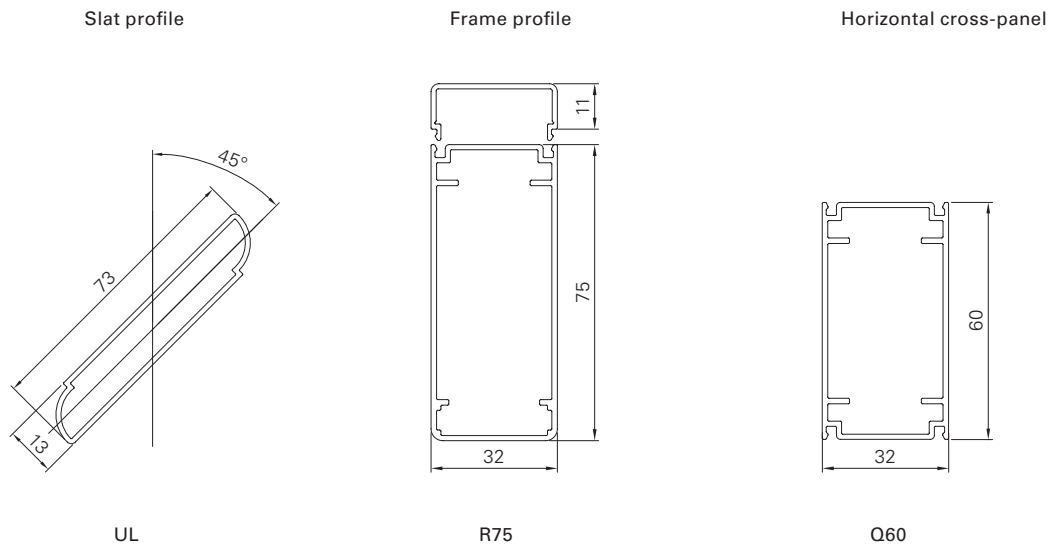

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Min./max. infeed	45,0–55,0 mm
Inclination angle	45°
Weight	Approx. 8 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Slat profile	73 × 13 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium profile
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile
Centre	Polystyrene rigid foam board with double-sided aluminium sheeting
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Notching Opener Floor locking Electric drive Easyflex Rabbit bead Vertical cross-panel Half-round arch (mounted) Horizontal cross-panel Inside opener crank Rod lock Slat end caps in sash colour Pre-installation Basic frame Catch Segmental arch, hollow (mounted) Segmental arch, solid (mounted) Frames