



ZUG

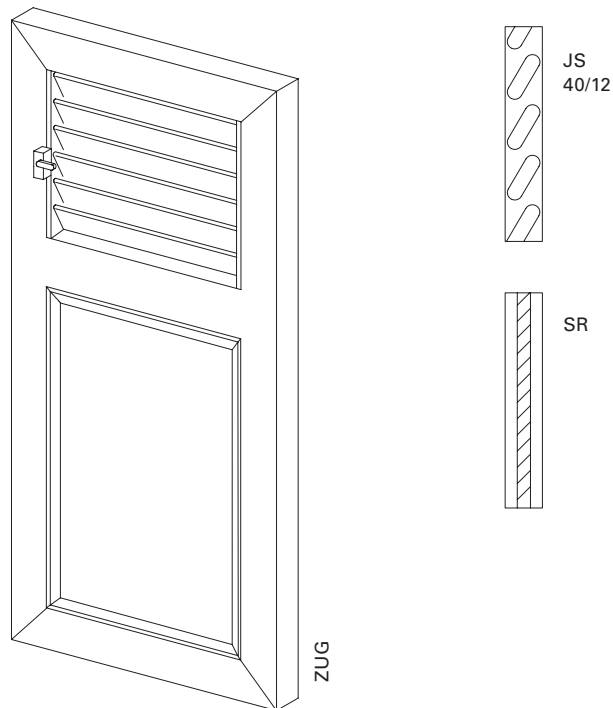


Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Finishes	Wood, stone, rust
Pretreatment	Ocean Line Plus possible
Notes	<p>Distribution of horizontal cross-panel: 1/3 top, 2/3 bottom Division by dimensions specification possible (depending on distribution of slats) Inserts are exchangeable Drain holes at bottom of frame</p> <p>Slat end caps made of black plastic Slats are exchangeable</p> <p>Adjustment lever is positioned roughly in the centre of the adjustable panel Structural height of adjustment lever approx. 30 mm – please observe in regard to cranking Opener can only be positioned in the centre panel When shutter closures are used (art. no. 5315/5316) supports are required (art. no. 5323)</p>

Slat profile




JS

Frame profile

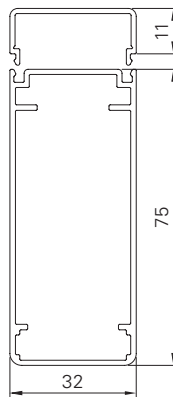

R75

Horizontal cross-panel



Q60

Min./max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Min./max. infeed	34,0–36,0 mm
Min./max. inclination angle	18–74°
Weight	Approx. 7 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Slat profile	40 × 12 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium profile
Horizontal cross-panel profile	60 × 32 mm extruded aluminium hollow chamber profile
Centre	Polystyrene rigid foam board with double-sided aluminium sheeting
Adjustment	Adjustable slats via lateral swivel lever lock with detent positions
Stop bead	Supplied loose, black or white rubber (depending on the sash colour)
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins

Options	Notching Add-on lock Opener Floor locking Electric drive Rabbet bead Vertical cross-panel Half-round arch (mounted) Horizontal cross-panel Inside opener crank Rod lock Basic frame Pre-installation Segmental arch, hollow (mounted) Catch Segmental arch, solid (mounted) Frames Easyflex
----------------	---